# LIGHTING 14

| INTERIOR & EXTERIOR                          |
|--|
| Downlights14.02 - 14.06                      |
| Touch & Switch Lamps 14.04 - 14.06           |
| Courtesy Lights 14.06 - 14.09                |
| Reading Lamps 14.09 - 14.10                  |
| Pathway & Step Lights14.11                   |
| Livewell Bait Tank Lights14.11               |
| Strip Lights14.11 - 14.14                    |
| Light Bars 14.14 - 14.17                     |
| Flood & Spot Lights14.14 - 14.19             |
|  |
| NAVIGATION                                   |
| Portable Emergency Lights14.20               |
| Bi-colour Lights14.20                        |
| Port & Starboard Lights 14.20 - 14.22        |
| 360°, Anchor & Masthead Lights 14.23 - 14.24 |
|  |
| UNDERWATER                                   |
| Narva Underwater Lights14.24                 |
| Hella Marine Apelo Underwater Lights14.25    |
| Bluefin Piranha Underwater Lights14.26       |
|  |
| HANDHELD                                     |
| Torches14.27                                 |
| Head Lamps14.27                              |
| Handheld Spotlights14.27                     |



#### **Hella Marine EuroLED Downlights**

The EuroLED range of lights are completely sealed, highly impact and shock resistant for an ultra long service life. Made in New Zealand, EuroLED lights can be installed almost anywhere on board, interior or exterior, wet or dry.



- Ultra low power consumption.
- UV, corrosion and impact resistant.
- High colour rendering (CRI 85).
- Stainless steel rims are 316-grade.



#### **EuroLED 75**

Power Consumption: 3W


12V or 24V Voltage: 100 (White) Lux @ 1m: Beam Angle: 80°

| White    | Plastic Rim     | Polished Stainless Rim |                 | Light      | Voltage |   |  |
|----------|-----------------|------------------------|-----------------|------------|---------|---|--|
| Part No. | Hella Code      | Part No.               | Hella Code      | Colour     | voitage |   |  |
| Screw    | Screw-in        |                        |                 |            |         |   |  |
| H64839   | 2JA 958 110-011 | H64840                 | 2JA 958 110-021 | White      | 12V     | 0 |  |
| H64843   | 2JA 958 109-011 | H64844                 | 2JA 958 109-021 | Warm White | 12V     | 0 |  |
| Spring   | Spring Clip     |                        |                 |            |         |   |  |
| H64847   | 2JA 958 110-511 | H64848                 | 2JA 958 110-521 | White      | 12V     | 0 |  |
| H64849   | 2JA 958 110-611 | H64850                 | 2JA 958 110-621 | White      | 24V     | 0 |  |
| H64851   | 2JA 958 109-511 | H64852                 | 2JA 958 109-521 | Warm White | 12V     | 0 |  |
| H64853   | 2JA 958 109-611 | H64854                 | 2JA 958 109-621 | Warm White | 24V     | 0 |  |



White Light White Rim Screw-in

Warm White Light Stainless Steel Rim Spring Clip

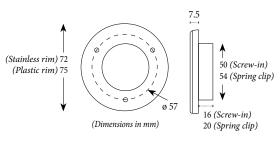

#### **EuroLED 95**

Power Consumption: 4W

Multivolt 12/24V Voltage: 350 (White) Lux @ 1m: 30° Beam Angle:


| Whit        | e Plastic Rim   | Polished Stainless Rim |                 | Light      |   |  |  |
|-------------|-----------------|------------------------|-----------------|------------|---|--|--|
| Part No.    | Hella Code      | Part No.               | Hella Code      | Colour     |   |  |  |
| Screw-in    |                 |                        |                 |            |   |  |  |
| H64860      | 2JA 980 940-001 | H64861                 | 2JA 980 940-011 | White      | ( |  |  |
| H64864      | 2JA 980 940-101 | H64865                 | 2JA 980 940-111 | Warm White | ( |  |  |
| Spring Clip |                 |                        |                 |            |   |  |  |
| H64862      | 2JA 980 940-201 | H64863                 | 2JA 980 940-211 | White      | ( |  |  |
| H64866      | 2JA 980 940-301 | H64867                 | 2JA 980 940-311 | Warm White | ( |  |  |
|             |                 |                        |                 |            |   |  |  |





White Light White Rim Spring Clip

Warm White Light Stainless Steel Rim Screw-in

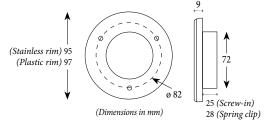

#### **EuroLED 115**

Power Consumption: 4.5W

Multivolt 12/24V Voltage: 385 (Warm White) Lux @ 1m:

36° Beam Angle:



Includes white spacer ring


| Whit                      | e Plastic Rim   | Polishe  | Polished Stainless Rim |            |
|---------------------------|-----------------|----------|------------------------|------------|
| Part No.                  | Hella Code      | Part No. | Hella Code             | Colour     |
| Screw                     | -in             |          |                        |            |
| H61252                    | 2JA 980 820-002 | H61254   | 2JA 980 820-012        | White      |
| H61256                    | 2JA 980 820-102 | H61258   | 2JA 980 820-112        | Warm White |
| Surface Mount with Switch |                 |          |                        |            |
| H61264                    | 2JA 980 828-002 | H61266   | 2JA 980 828-012        | White      |
| H61270                    | 2JA 980 828-102 | H61271   | 2JA 980 828-112        | Warm White |





White Light White Rim Screw-in

Warm White Light Stainless Steel Rim with Switch



#### **Quick LED Downlights**



These LED downlights have a low power consumption, 50,000 hour average lifetime and can be dimmed (with separate dimmer unit - not supplied).

• Multivolt 10-30V

• Pre-wired 200mm cable.

**Ö**0 IP40

20

IP66

Screw-in Mount

IP40

White Plastic Rim

White Plastic Rim

Polished Stainless Rim

Polished Stainless Rim

Polished Stainless Rim

• Stainless steel rims: 316-grade with polished mirror finish.

#### **TED Series**

Part No.

JPW12002

JPW12003

JPW12004

JPW12005

Screw-in Mount JPW12001

• Ideal for ceiling and wall installation.

Power Consumption: 2W

Lux @ 1m:

**Current:** 0.16A@12V

0.08A@24V

**Light Colour** 

Daylight

Warm White

Daylight

Warm White

Warm White

Beam Angle: 100°








Daylight Light White Plastic Rim Screw Mount

Warm White Light Stainless Steel Rim Spring Clip



## **TIM Series**

· Ideal for ceiling installation.

**Spring Clip Mount** 

· Polished stainless steel rim.

Power Consumption: 2W Lux @ 1m:

**Current:** 0.16A@12V

0.08A@24V

100° Beam Angle:

#### **SELENE Series**

- · Ideal for ceiling installation.
- · Polished stainless steel rim.

Power Consumption: 2W Lux @ 1m:


**Current:** 0.16A@12V

0.08A @ 24V

100° Beam Angle:




| Part No. | Light Colour |
|----------|--------------|
| JPW12006 | Warm White   |



#### Spring Clip Mount

| Part No. | Light Colour |
|----------|--------------|
| JPW12009 | Warm White   |



00

IP40

#### **MIRIAM Series**

- · Ideal for ceiling or wall installation.
- · Polished stainless steel rim.

Power Consumption: 2W Lux @ 1m:

**Current:** 0.16A@12V

0.08A @ 24V

100° Beam Angle:



#### Spina Clip Mount

| - paris - and an earne |          |              |         |                    |
|------------------------|----------|--------------|---------|--------------------|
|                        | Part No. | Light Colour |         | 16                 |
|                        | JPW12007 | Warm White   |         | 77                 |
|                        | JPW12008 | Daylight     | $\circ$ | (Dimensions in mm) |

#### **EDWIN Series**

- · Ideal for ceiling or wall installation.
- · Polished stainless steel rim.

Power Consumption: 2W Lux @ 1m:

**Current:** 0.16A@12V

0.08A @ 24V

Beam Angle: 100°

# IP66

..... 54 ......

Built-in

ON/OFF

Toggle Switch

#### Screw-in Mount

| Part No. | Light Colour |            | 14                 |
|----------|--------------|------------|--------------------|
| JPW12010 | Daylight     | $\bigcirc$ | 5 ] 72             |
| JPW12011 | Warm White   |            | (Dimensions in mm) |

#### **Hella Marine EuroLED Touch Series**

EuroLED 130 and 150 lamps incorporate the latest completely sealed touch sensitive technology. Simply touch the coloured or white pads to turn the light on or off. On the dual colour versions, hold your finger on the pad for more than two seconds and the lamp will cycle through four dimming levels to choose from. Advanced Hella Marine technology provides a safe, smooth and uniform LED light pattern, without glare or discomfort.



• Dual colour options.

- Ultra low power consumption.
- UV, corrosion and impact resistant.
- Stainless steel rims are 316-grade.

**J**0 IP67

#### **EuroLED Touch 130**

Surface mount

Power Consumption: 4W

Voltage: Multivolt 9-33V 475 (White) Lux @ 1m:

32° Beam Angle:



Completely sealed housing, pre-wired with marine cable.












H61163

H61161

H61159

| White Rim |                 | Black Rim |                 | Light        |            |
|-----------|-----------------|-----------|-----------------|--------------|------------|
| Part No.  | Hella Code      | Part No.  | Hella Code      | Colour       |            |
| H61159    | 2JA 959 950-121 | H61157    | 2JA 959 950-111 | White / Red  |            |
| H61165    | 2JA 959 951-121 | H61166    | 2JA 959 951-111 | White / Blue |            |
| H61163    | 2JA 959 950-521 | H61161    | 2JA 959 950-511 | White        | $\bigcirc$ |



#### **EuroLED Touch 150**

· Recess mount

Power Consumption: 4W

Multivolt 9-33V Voltage: 610 (White) Lux @ 1m:

30° Beam Angle:



Completely sealed housing, pre-wired with marine cable.








H61212

H61215

|   | White    | Plastic Rim     | Stainless Steel Rim |                 | Light       |          |
|---|----------|-----------------|---------------------|-----------------|-------------|----------|
|   | Part No. | Hella Code      | Part No.            | Hella Code      | Colour      |          |
| ĺ | H61208   | 2JA 980 630-001 | H61209              | 2JA 980 360-011 | White / Red | <b>Ø</b> |
|   | H61212   | 2JA 980 630-501 | H61213              | 2JA 980 630-511 | White       | 0        |
|   | H61214   | 2JA 980 630-601 | H61215              | 2JA 980 630-611 | Warm White  |          |





#### **Hella Marine DuraLED Series**

Completely sealed, powerful LED light for heavy duty applications and a safe, energy efficient and reliable alternative to incandescent and fluorescent lighting. DuraLED lamps are surface mounted and feature a unique installation system where the fastening load is taken up by a heavy duty nylon bush to eliminate possible stress on the lamp housing.



**J**0 IP67

- UV, corrosion and impact resistant.
- Ultra low power consumption.
- Pre-wired with marine cable.
- Multivolt 12/24V DC.

#### **DuraLED 12 with Switch**

• White plastic rim.


Power Consumption: 2.5W Lux @ 1m: 60 Beam Angle: 120°



Completely sealed housing, pre-wired with marine cable.



H61232







| Part No. | Hella Code      | Light Colour |         |
|----------|-----------------|--------------|---------|
| H61232   | 2JA 980 704-001 | White        | $\circ$ |
| H61231   | 2JA 980 704-501 | Warm White   |         |

### DuraLED 20

- White plastic rim
- · Spread lens.

Power Consumption: 4W Lux @ 1m: 390 Beam Angle: 64°



Completely sealed housing, pre-wired with marine cable.

#### **DuraLED 50LP (Low Profile)**


- · White plastic rim
- · Spread lens.

Power Consumption: 12W Lux @ 1m: 1650 Beam Angle: 36°





Completely sealed housing, pre-wired with marine cable.





| Part No. | Hella Code      | Light Colour |   |
|----------|-----------------|--------------|---|
| H61206   | 2JA 980 608-002 | White        | ( |

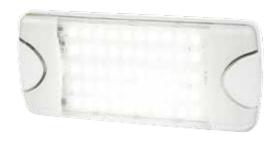



| Part No. | Hella Code      | Light Colour |         |
|----------|-----------------|--------------|---------|
| H61203   | 2JA 980 629-001 | White        | $\circ$ |


#### **Narva LED Saturn Touch Sensitive Interior Lamps**

NARVA

Elegant, ultra slim design ideal as down lighting in any marine application.

- Surface mountable with decorative bezel to hide mounting fixtures.
- Inbuilt touch sensitive on/dim/off switch.
- · Smooth yet powerful SMD LED lights.
- · Cable exit hole: 10mm.



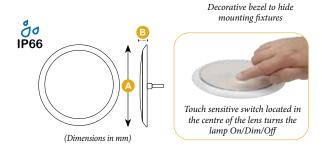

#### Saturn Touch Lamp Single Colour - White


Lux @ 1m:

Multivolt 9-33V Voltage:

**Colour Temp:** 5700°K Beam Angle: 105°

**Current Draw:** 0.19A@12V

0.1A @ 24V





#### **Saturn Touch Lamps Dual Colour - White/Red**

The dual colour function displays white or red illumination, ideal for applications where night vision needs to be preserved.

Voltage:

Colour Temp: 5700°K (white)

**Current Draw:** 0.03A @ 12V (N87501)

0.20A @ 12V (N87503)

| Don't Mo   | Dimension | Dimensions (mm) |   |  |  |
|------------|-----------|-----------------|---|--|--|
| Part No.   | Α         | В               |   |  |  |
| N87501WRBL | 75        | 10              | ( |  |  |
| N87503WRBL | 130       | 11              | ( |  |  |



#### Narva LED Interior Downlight

A contemporary design with frosted fascia provides a fresh and clean appearance, which is ideal for boats, caravan and motor

home interiors.

· Powerful broad spread cool white light.


· Ultra low current draw.

Power Consumption: 3W

Voltage: Multivolt 9-33V

Lux @ 1m: 40 105° Beam Angle:

**Current Draw:** 0.16A @ 12V / 0.08A @ 24V

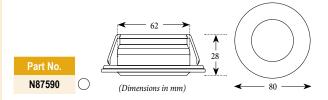



## Narva LED Courtesy Interior Lights

NARVA

Compact and modern style lamp housed in a quality fascia with concealed mounting screws. Low profile, surface mounted and easy to install.

· Highly polished chrome or white housing.





| ,         | ,              |
|-----------|----------------|
| Part No.  | Housing Colour |
| N87451-12 | White          |
| N87453-12 | Chrome         |



#### **LED Interior Surface Mount Dome Light**

Large, water resistant, surface mount light can be easily installed with pre-drilled mounting holes and pre-wired cables.

- 3x pre-drilled mounting holes.
- Pre-wired with 280mm cable.
- Dimensions (Dia x H): 146 x 40mm




| Part No. | Voltage | Lumens | Amp Draw |  |
|----------|---------|--------|----------|--|
| JPW11960 | 12-36V  | 700    | 0.66A    |  |

### **LED Cabin Light with Switch Cool White**

- 12V

White ABS plastic dome cabin light with 24 LEDs and on/off switch.

- 3x pre-drilled mounting holes.
- Pre-wired with 130mm cable.
- · Mounting screws supplied.
- Dimensions (Dia x H): 125 x 30mm









#### Narva LED Courtesy Strip Lights

LED courtesy strip light supplied with sealing gasket self tapping screws and screw caps for an attractive finish. Ideal for use in the marine, commercial or RV industry.

• Pre-wired and sealed in epoxy.

• Polycarbonate lens

N87602

NARVA

Voltage: 10-30V


**Lux @ 1m:** 20 (N87602) / 40 (N87604)

**Current Draw:** 0.03A @ 12V (N87602)

0.07A @ 12V (N87604)



| Part No.                | Dimensions (mm) |     |    |    |    | Mounting<br>Holes |    |      |      |
|-------------------------|-----------------|-----|----|----|----|-------------------|----|------|------|
| Part No.   Current Draw |                 | Α   |    | С  | D  |                   |    | G    | (mm) |
| N87602                  | 0.03A @ 10-30V  | 90  | 15 | 25 | 11 | 61                | 17 | 72.5 | 3    |
| N87604                  | 0.07A @ 10-30V  | 176 | 21 | 25 | 17 | 144               | 16 | 157  | 3    |



#### **Hella Marine Surface Mount Oblong Courtesy Lights**

Easy to install oblong LED lights featuring a slim and stylish design. These lamps are ideal for illuminating on board areas such as steps, stairs, toe kicks, storage areas, companion ways, deck fittings, signs and switches.

- · Completely sealed.
- Ultra low power consumption.
- · Made in New Zealand.

H64813

H64812

H64811

Power Consumption: 0.5W

• Pre-wired with 120mm cable.

• UV, corrosion and impact resistant.



Blue



# HELLA

#### **Hella Marine Slim Line Round Courtesy Lights**

These lights consume a fraction of the energy of traditional bulbs and run very cool due to their low current draw of less than 0.5W (less than 0.04A @ 12V). These stainless steel rimmed lights include a white spacer and a surface mounting ring.

• 316 stainless steel with mirror polished finish.

2XT 980 869-301

2XT 980 869-401

2XT 980 869-601

- UV resistant enhanced impact acrylic lens
- · Completely sealed.
- 12V White light with white rim also available (H61929).

Power Consumption: 0.5W











| Part No. | Hella Code      | Light Colour | Voltage |   |
|----------|-----------------|--------------|---------|---|
| H61825   | 2XT 980 500-521 | White        | 12V     | 0 |
| H61874   | 2XT 980 500-721 | Warm White   | 12V     | 0 |
| H61895   | 2XT 980 502-221 | Blue         | 12V     |   |
| H61826   | 2XT 980 501-521 | White        | 24V     | 0 |
| H61875   | 2XT 980 501-721 | Warm White   | 24V     | 0 |
| H61925   | 2XT 980 503-221 | Blue         | 24V     |   |





(Dimensions in mm)



<u>uick</u>

White light with white rim (12V)

Stainless steel cap fitted (Dimensions in mm)

#### **Quick LED Courtesy Lights**

Quick courtesy lights have an ultra-low power consumption and are rated for internal or external use.


- Colour rendering (CRI 80).
- 316-grade stainless steel with mirror polished finish.
- Average Lifetime: 50,000 hrs.
- · Adhesive mounting ideal for wall mount installation.

 $\textbf{Power Consumption:} \qquad 0.24 \text{W} \textcircled{@} \ 12 \text{V} \ / \ 0.48 \text{W} \textcircled{@} \ 24 \text{V}$ 

 Voltage:
 Multivolt 10-30V

 Current Draw:
 0.02A @ 12V / 24V





(Dimensions in mm)

#### **TESS Series**



| Part No. | Light Colour |
|----------|--------------|
| JPW12018 | White        |
| JPW12019 | Warm White   |





# IDW MARINE

#### **LED Traditional Dome Lights**

Surface mount, pre-wired light with a polished 304-grade stainless steel housing and diffused glass lens for an even spread of light.

• Includes toggle switch on the side.

**Power Consumption:** 1.2W **Voltage:** 12V

Current Draw: 0.1A @ 12V





JPW11801

JPW11800

| Part No. | Light Colour | Lens Dia (mm) | External Dia (mm) |            |
|----------|--------------|---------------|-------------------|------------|
| JPW11800 | White        | 90            | 140               | $\bigcirc$ |
| JPW11801 | White        | 100           | 170               | $\bigcirc$ |

#### **Rectangle Transom/Courtesy Light**


A traditional compact flush mount transom courtesy light, fully wired for use, no switch supplied.

• 304-grade stainless steel.

· Festoon bulb.

Power Consumption: 10W Voltage: 12V





#### **LED Rectangular Transom/Stern Light**

White LED transom and stern light with stainless steel flush mount housing.


- · Visible distance of 2NM
- Ideal for boats up to 20m.

Power Consumption: 10W Voltage: 12V









## Narva Interior Reading Lamps with Touch Dim Switch

Stylish LED reading lamps with touch sensitive switch and built-in blue night light, constructed using top quality materials with concealed mounting screws.

Highly polished finish.Voltage: Multivolt 10-30V



NARVA

#### Reading Lamp - Chrome Finish

Power Consumption: 3W



| Part No. | Light Colour | Temperature |            |
|----------|--------------|-------------|------------|
| N87462   | Cool White   | 6000°K      | $\bigcirc$ |

## Reading Lamp - Chrome Finish with Glass Reflector

Power Consumption: 1W



| (Dime    |              |             |   |
|----------|--------------|-------------|---|
| Part No. | Light Colour | Temperature |   |
| N87464   | Cool White   | 6000°K      | 0 |
| N87466   | Warm White   | 3200°K      |   |

# Reading Lamp - Brushed Aluminium Finish with Glass Reflector

Power Consumption: 3W
Current Draw: 0.26A @ 12V



| Part No. | Light Colour | Temperature |  |
|----------|--------------|-------------|--|
| N87470   | Warm White   | 3200°K      |  |

This 1W LED light delivers a bright, powerful spread of light. Ideal as a bedside or utility cabin light.

• 350° rotation and 45° tilt.

· Modern contemporary design.

Power Consumption: 1W

Voltage: Multivolt 9-33V


 Lux @ 1m:
 200

 Beam Angle:
 30°

 Colour Temperature:
 5700°K

 Current Draw:
 0.11A @ 12V

0.06A @ 24V



#### Narva LED Interior Swivel Light - 10-30V

The ultra low current draw makes this lamp perfect for boat, campers, caravans and mobile homes. The powerful 1W LED provides a bright and even spread of light.

• 350° rotation and 35° tilt light adjustment.

Power Consumption: 1W

Part No. N87646BL


Voltage: Multivolt 10-30V

 Lux @ 1m:
 600

 Beam Angle:
 20°

 Colour Temperature:
 5700°K

 Current Draw:
 0.12A @ 12V



(Dimensions in mm)



| Part No. | Light Colour |            |                 |
|----------|--------------|------------|-----------------|
| 87654BL  | White        | $\bigcirc$ | Tilt and rotate |

#### Quick LED Reading Lamps

Quick

Mirror polished aluminium reading lights with low power consumption, ideal for wall mount installation.

- Fitted head for adjustable light direction.
- Colour rendering (CRI 80).

NARVA

NARVA

• Average lifetime: 50,000hrs.

Power Consumption: 2.5W

Voltage: Multivolt 9-33V

 Lumens:
 160 (white)

 Current Draw:
 0.21A @ 12V / 0.11A @ 24V


 IP40





#### **Narva Hand Rail Chrome** Polished with LED Light

Fully sealed, premium hand rail with LED light provides effective



Current Draw: 0.13A @ 12V

12V



## Narva LED Step Lights Chrome Finish


A stylish and economical option for lighting steps and other small spaces, suitable for interior or exterior applications.

• Ultra reliable with 50,000 hours life.

Multivolt 10-30V Voltage: 5700°K

**Colour Temperature: Current Draw:** 0.02A@12V 0.01A@24V







| Part No. | Light Colour |   |
|----------|--------------|---|
| N87608BL | Cool White   | ( |
| N87609BL | Blue         | ( |
| N87610BL | Red          | ( |



NARVA







#### **LED Livebait Water Resistant Light**


Water resistant LED light, ideal for low level exterior, courtesy or stairway lighting, live bait tanks or thru-hull mounting fish attracting light.

· Includes 2x gaskets and nylon backing nut.


• Pre-wired 180mm cable.

Power Consumption: 0.3W

Voltage: 12V







HELLF

#### **Hella Marine Livewell Bait Tank** LED Lights - 12V

go

**IP67** 

Durable polycarbonate housing supplied with a plastic nut and rubber gaskets for a watertight seal. Installation is quick and easy into often inaccessible locations.



• Pre-wired 120mm cable.

Power Consumption: 0.5W 12V Voltage:


**Current Draw:** 0.04A@12V



| Part No. | Light Colour |  |
|----------|--------------|--|
| H61242   | Blue         |  |
| H61243   | Red          |  |








## Bluefin LED Pathway Deck Lights Bluefin LED

- Stainless Steel

Patented compact design, fully constructed from 316L polished stainless steel. Features OSRAM LEDs and fully sealed cable gland with 7m of 2 core moisture guard cable. Jo IP66

· Toughened optical glass lens.

Power Consumption: 8.5W Voltage: 12V Lumens: 300 Beam Angle: 110° **Current Draw:** 500Ma @ 12V

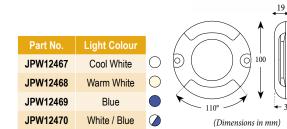

## **LED Waterproof Flexible Strip Lights - 12V**

Ideal for use in marine, RV, commercial and auto applications.

- · Waterproof however not for underwater use.
- · Supplied with 200mm of wire.

JPW11795



White



2.5

Cut-out

# JPW MARINE

#### **Narva LED Interior Strip Lights**

These low profile LED strip lights will complement marine or RV interiors. With changable end covers included, they can be surface or corner mounted, or connect multiple lengths for a continuous customised look for added versatility.

- Virtually unbreakable polycarbonate lens.
- 10mm hole required for mounting.



· SMD LED technology.

Voltage: Multivolt 12/24V

**Lux @ 1m:** 28 (N57524BL) / 56 (N57526BL)

**Beam Angle:** 105° **Colour Temperature:** 5700°K

Current Draw: 0.09A @ 12V / 0.05A @ 24V (N57524BL)

0.15A @ 12V / 0.07A @ 24V (N57526BL)





Changeable end covers included



|          |             | 77                 |
|----------|-------------|--------------------|
| Part No. | Length (mm) |                    |
| N87524BL | 150         |                    |
| N87526BL | 300         | (Dimensions in mm) |

# Narva LED Interior Strip Light with Touch Sensor Switch

NARVA

Same design as above but with in-built touch-sensitive on/off switch.


Voltage: Multivolt 12/24V

**Lux @ 1m:** 56 **Beam Angle:** 105°

IP66

Colour Temperature: 5700°K

Current Draw: 0.17A @ 12V / 0.09A @ 24V

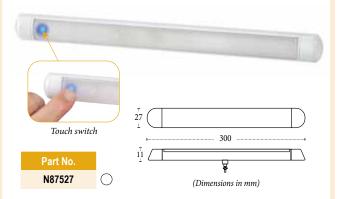

## Narva LED Interior Strip Light - High Powered

NARVA

High-powered LED interior strip lamp with in-built on/off switch, robust aluminium housing, and impact-resistant design.

- · Virtually unbreakable polycarbonate lens.
- 10mm hole required for mounting.
- · SMD LED technology.

**Voltage**: 12V **Lux @ 1m**: 80

Beam Angle: 105°


Colour Temperature: 5700°K

Current Draw: 0.34A at 12V



Low profile, surface mountable design



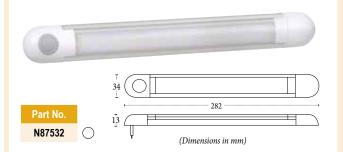

## Narva LED Exterior Strip Lights - High Powered

NARVA

- High Powered

Impact resistant, fully sealed design, constructed with a robust aluminium housing, built to withstand harsh exterior environments.


- · SMD LEDs deliver a powerful spread of light.
- · Low current draw.

Voltage: Multivolt 9-33V

**Beam Angle:** 105° **Colour Temperature:** 5700°K



Low profile, surface mountable design

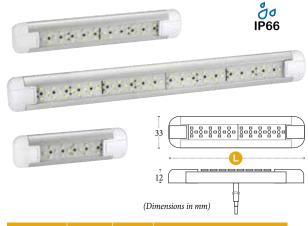

| Part No.          | Length<br>(mm) | Lux<br>@ 1m | Current Draw              |            |
|-------------------|----------------|-------------|---------------------------|------------|
| N87540            | 114            | 28          | 0.09A @ 12V / 0.05A @ 24V | $\bigcirc$ |
| <b>N87541</b> 178 |                | 44          | 0.16A @ 12V / 0.08A @ 24V | $\bigcirc$ |
| N87542            | 306            | 96          | 0.33A @ 12V / 0.17A @ 24V | $\bigcirc$ |
| N87543            | 500            | 200         | 0.6A @ 12V / 0.3A @ 24V   | $\bigcirc$ |

#### **Hella Marine Surface Mount LED Strip Series**

Featuring a light weight, ultra-low profile design made from enhanced impact resistant acrylic and offering outstanding UV resistance.

- Dual colour options.
- Pre-wired 500mm twin core cable.
- High Colour Accuracy (CRI 85).
- Low power consumption <3W.
- · Corrosion resistant
- · Made in New Zealand.

Power Consumption:3W (White)Voltage:12V or 24VLux @ 1m:256 (White)

Beam Angle: 40°
Colour Temperature: 5000°K (White)

2700°K (Warm White)

**Current Draw:** 0.25A @ 12V / 0.16A @ 24V (White)



Low profile, surface mountable design

**J**0 IP67

| 12V         |                 |          | 24V             |              |  |  |  |
|-------------|-----------------|----------|-----------------|--------------|--|--|--|
| Part No.    | Hella Code      | Part No. | Hella Code      | Colour       |  |  |  |
| With Switch |                 |          |                 |              |  |  |  |
| H61280      | 2JA 958 123-001 | H61281   | 2JA 958 123-401 | White        |  |  |  |
| H61278      | 2JA 958 121-001 | H61279   | 2JA 958 121-401 | White / Red  |  |  |  |
| H61274      | 2JA 958 121-011 | H61275   | 2JA 958 121-411 | White / Blue |  |  |  |
| Withou      | ut Switch       |          |                 |              |  |  |  |
| H61292      | 2JA 958 124-001 | H61293   | 2JA 958 124-401 | White        |  |  |  |
| H61294      | 2JA 958 124-101 | H61295   | 2JA 958 124-501 | Warm White   |  |  |  |



### **Hella Marine Surface Mount LED Strip Courtesy Series**

Highly effective illumination with minimal energy use and soft uniform courtesy light pattern, ideal for interior downlighting to cockpit enhancing courtesy lighting.

- UV and impact resistant.
- Pre-wired 500mm twin core cable.

**J**0 IP67

- Low power consumption <1.5W.
  - Made in New Zealand.

**Power Consumption:** 1.5W

**Voltage:** 12V or 24V **Lux @ 1m:** 256 (White)


Beam Angle: 42°

Colour Temperature: 5000°K (White)

2700°K (Warm White)

**Current Draw:** 0.15A @ 12V / 0.06A @ 24V

| 12V      |                 | 24V      |                 | Light      |   |
|----------|-----------------|----------|-----------------|------------|---|
| Part No. | Hella Code      | Part No. | Hella Code      | Colour     |   |
| H61272   | 2JA 980 881-012 | H61276   | 2JA 980 881-112 | White      | С |
| H61283   | 2JA 980 881-212 |          | -               | Warm White |   |
| H61289   | 2JA 980 881-402 | H61291   | 2JA 980 881-502 | Blue       |   |

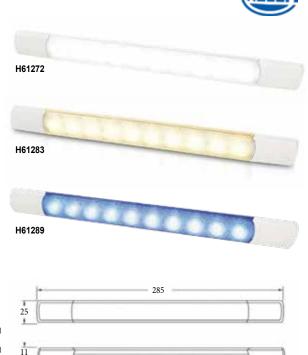

(Dimensions in mm)

NARVA

The range of Navigata LED light bars feature a one piece die-cast aluminium housing and virtually unbreakable hard coated polycarbonate lens. They produce an extra penetrating light output resulting in a 30% brighter output compared to a conventional LED light bar of the same length.

· Single or double row bars.

• Pre-wired weatherproof DT connector.

**Power Consumption:** 

5W

Multivolt 9-32V Voltage:







**Single Row - 178mm (7")** 

3000 Lumens: LEDs: 6

**Current:** 1.6A @ 12V 0.9A @ 24V



#### Single Row - 350mm (14")

6000 Lumens: LEDs: 12

NARVA

**Current:** 2.6A @ 12V 1.3A @ 24V



#### Single Row - 550mm (22")

9000 Lumens: LEDs: 18

**Current:** 3.7A @ 12V 1.9A @ 24V



#### Double Row - 550mm (22")

Lumens: 18000 LEDs: 35 6.6A @ 12V **Current:** 





NARVA

JP66

| Part No. | Rows Length |             | Housing | Dimensions (mm) |    |     |    |  |
|----------|-------------|-------------|---------|-----------------|----|-----|----|--|
| rait No. | Rows        | (mm) Colour | Colour  | Α               |    | С   | D  |  |
| N72271W  | Single      | 178         | White   | 50              | 62 | 178 | 38 |  |
| N72272W  | Single      | 350         | White   | 50              | 62 | 350 | 38 |  |
| N72274W  | Single      | 550         | White   | 51              | 64 | 550 | 38 |  |
| N27782   | Double      | 550         | Black   | 84              | 90 | 550 | 68 |  |
| N27782W  | Double      | 550         | White   | 84              | 90 | 550 | 68 |  |

#### Narva LED Scene Surface **Mount Flood Light**

Engineered for emergency services vehicles, constructed from a diecast aluminium housing and covers for the best possible UV protection.

• 6 x 3W high power OSRAM LEDs.

Virtually unbreakable hard coated polycarbonate lens.

Snap on end caps to conceal mounting screws.

Multivolt 9-33V Voltage:

1500 Lumens: Beam Angle: 40°

**Current Draw:** 1.1A @ 12V / 0.6A @ 24V



#### Narva LED Strip Lights with Touch Switch - Dual Colour

Sleek and low profile strip lamps, dual colour with a touch sensitive switch. Fully sealed suitable for either interior or exterior applications.

Voltage: 12V Lux @ 1m: 287 Beam Angle: 60°

Colour Temp: 6200°K (white) **Current Draw:** 0.41A @ 12V (White)

0.19A @ 12V (Blue/Red)



#### **Hella Marine Sea Hawk LED Flood Lights**

Sea Hawk Flood Lights feature a unique corrosion proof housing that is precision injection moulded from thermally conductive ceramic polymer. This advanced material draws heat from internal electronics for reliable long-term operation and eliminates the need for an aluminium housing, removing corrosion risks in the harsh marine environment.



- Ultra-low power consumption.
- UV, corrosion and impact resistant.
- Heavy duty Grilamid lens.
- · Made in New Zealand.

#### • Pre-wired with 2.5m marine cable. • Multivolt 12/24V DC.

#### Sea Hawk

Power Consumption: 3W 200 Lumens:

Dimensions (HxWxD): 53 x 136 x 49mm (including bracket)



| Black Housing |                 | Whi      | te Housing      | Lens   |   |
|---------------|-----------------|----------|-----------------|--------|---|
| Part No.      | Hella Code      | Part No. | Hella Code      | Type   |   |
| H61589        | 2LT 980 670-301 | H61590   | 2LT 980 670-311 | Spread | C |

#### Sea Hawk-R Recessed Mount

Power Consumption: 7W 550 Lumens:

Dimensions (HxWxD): 50 x 176 x 43mm



| Black Housing |                 | Whi      | te Housing      | Lens   |   |
|---------------|-----------------|----------|-----------------|--------|---|
| Part No.      | Hella Code      | Part No. | Hella Code      | Type   |   |
| H64800        | 2LT 980 577-001 | H64801   | 2LT 980 577-011 | Spread | 0 |

#### Sea Hawk-XLR

Power Consumption: 18W (High); 2W (Low)

Lumens: 1500

Dimensions (HxWxD): 68 x 170 x 58mm (including bracket)



| Black Housing |                 | Wh       | ite Housing     | Lens   |            |
|---------------|-----------------|----------|-----------------|--------|------------|
| Part No.      | Hella Code      | Part No. | Hella Code      | Type   |            |
| H64793        | 2LT 980 740-001 | H64794   | 2LT 980 740-011 | Spread | $\bigcirc$ |
| H64795        | 2LT 980 740-201 | H64796   | 2LT 980 740-211 | Spot   | $\bigcirc$ |

#### Sea Hawk-R Bracket Mount

Power Consumption: 7W Lumens: 550

Dimensions (HxWxD): 53 x 136 x 49mm (including bracket)



| Black Housing |                 | Whi      | te Housing      | Lens   |            |
|---------------|-----------------|----------|-----------------|--------|------------|
| Part No.      | Hella Code      | Part No. | Hella Code      | Type   |            |
| H64797        | 2LT 980 573-011 | H64798   | 2LT 980 573-021 | Spread | $\bigcirc$ |

#### Narva LED Dual Colour White Red Deck Lights

Featuring an all nylon body and bracket to prevent corrosion, and are shock and vibration tested to the marine standard. The adjustable 360° bracket can mounted via a single bolt or two screws for installation in any location.


• Flood beam dual colour white or red illumination.

· Pre-wired cable.

Voltage: Multivolt 9-33V Lumens: 1000 (white) **Current Draw:** 0.57A@12V



| Part No. | Housing Colour | Dimensions W x H x D (mm) |   |
|----------|----------------|---------------------------|---|
| N72443   | Black          | 178 x 60.5 x 41           | ( |
| N72443W  | White          | 178 x 60.5 x 41           | ( |



NARVA

#### Hella Marine Sea Hawk-360 LED Light Bars




These light bars generate over 2200 lumens of crisp, white light while continuing the durability and efficiency advantages accustomed to the Sea Hawk range. Supplied with a versatile 316-grade stainless steel bracket design which allows upright or pendant mount with feet aimed in or out.

- · Low power consumption.
- · UV, corrosion and impact resistant.
- Heavy duty Grilamid lens.
- Pre-wired with 2.5m marine cable.
- · Made in New Zealand.

Power Consumption: 25W (High); 5W (Low)
Voltage: Multivolt 12/24V DC IP67

Lumens: 2200





| Bla      | ck Housing      | Whi      | ite Housing     | Lens   |   |
|----------|-----------------|----------|-----------------|--------|---|
| Part No. | Hella Code      | Part No. | Hella Code      | Type   |   |
| H64815   | 2LT 958 040-701 | H64816   | 2LT 958 040-711 | Spread | ( |
| H64817   | 2LT 958 040-651 | H64818   | 2LT 958 040-661 | Spot   | ( |

#### Hella Marine Sea Hawk-470 LED Light Bars



Sea Hawk-470 LED Combi spot and spread floodlight is a unique light bar offering three light options: close range, long range or combined all in a single light bar. Supplied with a versatile 316-grade stainless steel bracket design which allows upright or pendant mount with feet aimed in or out.


- Low power consumption.
- UV, corrosion and impact resistant.
- · Heavy duty Grilamid lens.
- Pre-wired with 2.5m marine cable.

**J**0 IP67

· Made in New Zealand.

Power Consumption: 36W (High); 4W (Low)
Voltage: Multivolt 12/24V DC

Lumens: 2800

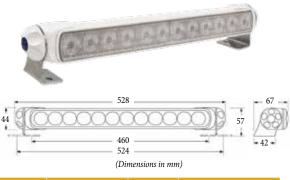

| Part No. | Hella Code      | Housing | Lens Type            |   |
|----------|-----------------|---------|----------------------|---|
| H64822   | 2LT 958 130-451 | White   | Combi - Spead & Spot | ( |

#### Hella Marine Sea Hawk-470 LED Pencil Beam with Edge Light



Combines a long distance white light, performance capable of picking out even the most distant objects, and a striking Edge Light. Supplied with a versatile 316-grade stainless steel bracket design which allows upright or pendant mount with feet aimed in or out.

- · Low power consumption.
- UV, corrosion and impact resistant.
- Heavy duty Grilamid lens.
- Pre-wired with 2.5m marine cable.
- Made in New Zealand.

**Power:** Pencil Beam: 36W (2.7A @ 12V / 1.4A @ 24V)

Blue Edge Light: 2W (160mA @ 12V/ 80mA @ 24V)


White Edge Light: 4W (300mA @ 12V / 150mA @ 24V)

Voltage: Multivolt 12/24V DC

**Lumens:** 1700





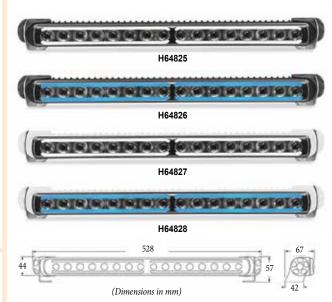

| Part No. | Hella Code      | Housing | Edge Light |
|----------|-----------------|---------|------------|
| H64825   | 2LT 958 140-501 | Black   | White      |
| H64826   | 2LT 958 140-521 | Black   | Blue       |
| H64827   | 2LT 958 140-511 | White   | White      |
| H64828   | 2LT 958 140-531 | White   | Blue       |



IP69K

#### Straight LED Light Bar 9600 Lumens

Die-cast aluminium alloy housing fitted with 40x 3W LEDs operating as a spot and flood light.

**J**0 IP68

- · Rigid mount provides easy installation.
- Impact-resistant polycarbonate lens.
- · Dust tight and waterproof.
- 360° rotation angles.

Power Consumption: 120W

Multivolt 9-32V Voltage:

9600

Lumens:



waterproof cable



#### **Curved LED Light Bar 23040 Lumens**

Die-cast aluminium alloy housing fitted with 96x 3W LEDs, supplies an excellent flood of illumination and operating as a forward facing spotlight.

- · Rigid mount provides easy installation.
- Impact-resistant polycarbonate lens.
- · Dust tight and waterproof.
- 360° rotation angles.

Power Consumption: 288W


Voltage: Multivolt 9-32V

Lumens: 23040





Pre-wired 700mm waterproof cable

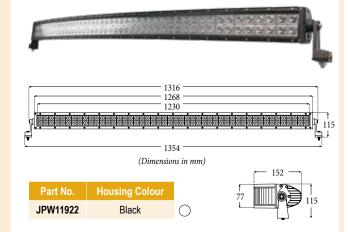

#### LED Flood Light 3400 Lumens - White

ADC12 aluminium alloy housing with breather filters, fitted with 4x 10W OSRAM LEDs to provide a mass volume of light.

- 316-grade stainless steel bracket.
- · Impact-resistant polycarbonate lens.
- · Completely dust tight and waterproof.
- · 360° rotation angles.


Power Consumption: 40W

Voltage: Multivolt 9-32V

3400 Lumens:

85° (flood) / 15° (spot) Beam Angle:



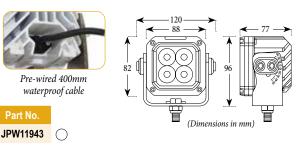


#### LED Flood Light 3200 Lumens - Black

Same features as the above, with a slightly different housing and only 3200 lumens.











#### **LED Flood Light 1400 Lumens**

Die-cast aluminium alloy housing with breather filters, fitted with 6x 3W LEDs to supply an excellent flood of illumination.

· Impact-resistant polycarbonate lens.

· 316-grade stainless steel bracket.

· Dust tight and waterproof.

• 360° rotation angles.

18W Power:

Voltage: Multivolt 9-32V

Lumens: 1400



| Part No. | Housing |   |
|----------|---------|---|
| JPW11941 | White   | ( |
| JPW11942 | Black   | ( |



#### **LED Spot Light - Square**

High-powered LED spot light with water resistant white aluminium heatsink body cover. Includes 300mm cable and stainless steel brackets.

· Light configuration: 2 direct / 6 spread.

Power Consumption: 11W LEDs:

Voltage: Multivolt 9-36V

840 Lumens: 6272°K **Colour Temperature:** 



#### **LED Flood Light - Square**

High-powered LED floodlight with water resistant white aluminium heatsink body cover. Includes 300mm cable and stainless steel brackets.

Light configuration: 12 flood.

Power Consumption: 12.8W

Voltage: Multivolt 9-36V

Lumens: 950 Co

| olour Tempe | rature: 6430°K            | 100   |
|-------------|---------------------------|-------|
| Part No.    | Dimensions W x H x D (mm) | å     |
| JPW11954    | 110 x 100 x 45            | O IP6 |

#### Viper ET 20W LED Deck Light

This 2x 10W CREE LED flood deck light with diecast white aluminium housing boasts a low power consumption while providing an even, solid spread of light. Includes 316-grade stainless steel mounting bracket.

Power Consumption: 10W

Multivolt 10-30V Voltage:

Lumens: 1800

| Part No. | Dimensions W x H x D (mm) | 00     |
|----------|---------------------------|--------|
| JPW11980 | 96 x 62 x 71              | O IP67 |

#### Narva ALS Rechargeable **LED Flood Light**

Featuring high efficiency COB LEDs which provide a broad uniform flood

beam pattern to seamlessly illuminate large areas.

- Power bank function for charging mobile devices.
- Visible readout of battery status.
- · Glow in the dark locator.



#### **Bluefin Firefly Bracket Mount** Stainless Steel Flood Lights

Contructed from solid 316L polished stainless steel and features a bracket mount that is perfectly tailored for lighting the deck and engine spaces.


- Thermal rollback and over / under voltage protection.
- Integrated over moulded 2 core cable with 200mm leads.
- · Toughened optical glass lens.

14W Power: Lumens: 1000 (Cool White)

Current Draw: 1A @ 12V / 500Ma @ 24V

Multivolt 9-32V Voltage:

Beam Angle: 95° (Flood) / 35° (Spot)

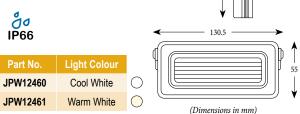

#### **LED AutoLamps Flood Lights**

High brightness flood lights with an e-coated die cast alloy housing and adjustable stainless steel bracket.

· Polycarbonate lens.

20

Part No.

JPW11845

Viper

NARVA

- · Includes stainless steel fittings.
- · Pre-wired waterproof cable.

**Power Consumption:** 

Voltage: Multivolt 9-30V

4 LEDs: Lumens: 660

**Current Draw:** 0.59A@13.8V

0.27A@28V











JPW11845

JPW11948

| Series | Туре   | Housing<br>Colour | Dimensions<br>W x H x D (mm) |   |
|--------|--------|-------------------|------------------------------|---|
| 7312   | Square | White             | 73 x 73 x 31                 | ( |
| 7312   | Square | Black             | 73 x 73 x 31                 | ( |
| 7512   | Round  | White             | 75 x 75 x 30                 |   |
| 7512   | Pound  | Black             | 75 v 75 v 30                 | ( |

 $\bigcirc$ JPW11948 JPW11846 0 JPW11847  $\bigcirc$ JPW11848 13040 130 x 40 x 43 Rectangle Black JPW11849 13040 130 x 40 x 43  $\bigcirc$ Rectangle White

#### Narva LED Flood Beam **Work Lights**

NARVA

Economical and reliable compact flood beam light with powerful LEDs, ideal for close range illumination and where space is limited. Fully sealed with a pre-wired, die-cast aluminium powder coated housing.

- 316-grade stainless steel hardware.
- Virtually unbreakable polycarbonate lens.

00 Voltage: 9-33V IP66 Beam Angle: 12°



Adjustable mounting bracket

N72446

#### Slim Square - 600 Lumens

1W Power: LEDs: 4

Current: 04A@ 12V / 0.19A@ 24V

| Part No. | Dimensions W x H x D (mm) |
|----------|---------------------------|
| N72412W  | 70 x 96 x 35              |



Power: 5W LEDs: 2

Part No.

Current: 0.58A @ 12V / 0.3A @ 24V



| N72446  | Black | 93 x 81 x 55 | 0 |
|---------|-------|--------------|---|
| N72446W | White | 93 x 81 x 55 | 0 |
|         |       |              |   |

#### Slim Round - 1000 Lumens

Power: 1W LEDs: 10

Current: 0.9A @ 12V / 0.45A @ 24V

|          | .57.66 12.7 5.157.66 2.17 |            | SIL  |
|----------|---------------------------|------------|------|
| Part No. | Dimensions W x H x D (mm) | $\bigcirc$ | 2 =4 |
| N72425W  | 110 x 144 x 39            |            | 1    |
|          |                           |            |      |

#### Square - 2000 Lumens

Power: 5W LEDs:

Current: 1.3A@ 12V / 0.7A@ 24V

| Part No. | Dimensions W x H x D (mm) |
|----------|---------------------------|
| N72449W  | 110 x 137 x 84            |

#### Rectangle - 3000 Lumens

5W Power: LEDs:

Current: 1.85A @ 12V / 0.9A @ 24V

| Part No. | Dimensions W x H x D (mm) |
|----------|---------------------------|
| N72451W  | 150 x 145 x 84            |



#### **LED Autolamps Remote Controlled** Search Light

IP65

(Ocean)

High powered 60W search lamp with a vast lens range of over 220m. Control via the Bluetooth remote supplied or with a smart phone.

- · 360° rotation and 60° tilt.
- 4 point fixed mount.
- Includes 3m cable with 12V plug.
- ECE R10 Approved.

10W Power:

Multivolt 10-30V Voltage:

Lumens: 3092 LEDs:

> Part No. N72443

**Current Draw:** 3.04A @ 13.8V

1.46A @ 28V



#### **Electric Pro LED Spotlights**

Powerful rotating searchlights that offers the best combination of beam spread and intensity which results in a brighter, wider beam pattern of 300m for maximum viewing safety.

· Includes remote control.

Power: 27W 12V Voltage: LEDs: **Current Draw:** 4A@12V

Dims (LxWxH): 230 x 185 x 210mm

| Part No. | Туре     |            |
|----------|----------|------------|
| JPW15896 | Wireless | $\bigcirc$ |
| JPW15897 | Wired    | $\bigcirc$ |





Wired Remote Wireless Remote



#### **LED Portable Emergency Navigation** Lights

Portable navigation lights can be removed with ease. Made from hiimpact ABS plastic and requires 3 x C cell batteries for operation (not supplied). Bi-colour for Port and Starboard and 360° all round white.

· Ideal for inflatable boats



JPW1682

JPW1683



| Part No. | Туре      | Mounting Type | Height (mm) |           |
|----------|-----------|---------------|-------------|-----------|
| JPW1681  | 360°      | Suction Cup   | 250         | $\subset$ |
| JPW1682  | Bi-Colour | Suction Cup   | 110         | 0         |
| JPW1683  | Bi-Colour | C-Clamp       | 150         | 0         |
| JPW1684  | 360° Pole | C-Clamp       | 660         | C         |

#### **LED Portable Emergency Navigation Lights - Compact**

Made from hi-impact ABS plastic these compact portable emergency nav lights require 3x AAA cell batteries for operation (not supplied).

- · Ideal for inflatable boats.
- Horizontal or vertical surface mounting.
- · Minimum visible distance: 2 NM



| Part No. | Туре      | Mounting Type     | Height (mm) |   |
|----------|-----------|-------------------|-------------|---|
| JPW1650  | 360°      | C-Clamp           | 650         | ( |
| JPW1651  | 360°      | Super Suction Cup | 200         | ( |
| JPW1652  | 360°      | Super Suction Cup | 380         | ( |
| JPW1660  | Bi-Colour | Super Suction Cup | 110         |   |

#### **LED Bi-colour Port and Starboard Navigation Side Light**


12V LED bi-colour surface mount nav light with removable stainless steel housing for mounting and a black rubber gasket base.

· Minimum visible distance: 2 NM

**Power Consumption:** 2.2W Voltage: 12V

**3**0 IP67

JPW1635



#### Narva LED Bi-Colour **Navigation Light**

NARVA


Surface mount bi-colour light, ideal for yachts and powerboats up to 20m.

- · Coloured (red/green) lenses.
- · Minimum visible distance: 2 NM @ 112.5°
- Ultra reliable +50,000hrs life.

Voltage:

Multivolt 9-33V





#### **Hella Marine NaviLED 360 PRO All Round Navigation Lights**

Modern low profile design incorporates Grilamid lens material for extreme durability.

• Pre-wired 1.5m twin core cable.

Minimum visible distance: 2 NM

· Ultra low power consumption.

Power Consumption: < 1.5W

Multivolt 12/24V



| (=,           |          |                 |          |                 |        |
|---------------|----------|-----------------|----------|-----------------|--------|
| Black Housing |          |                 | Wh       | Light           |        |
|               | Part No. | Hella Code      | Part No. | Hella Code      | Colour |
|               | H61607   | 2LT 980 910-121 | H61610   | 2LT 980 910-131 | White  |
|               | H61508   | 2LT 980 910-521 | H61511   | 2LT 980 910-531 | Red    |
|               | H61509   | 2LT 980 910-321 | H61512   | 2LT 980 910-331 | Green  |

 $\bigcirc$ 



NARVA

#### **LED Autolamps Series 52 Navigational Lights**




Waterproof navigational lights provide an angled beam from 10 high powered LEDs. Includes removable backing plate to hide the supplied mounting screws within a slimline design.

- ATAC Compliant.
- 180mm of pre-wired cable.
- · Sold individually.



Voltage: Multivolt 12/24V

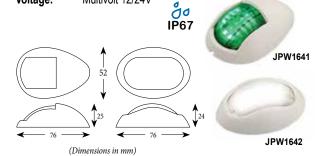


| Part No. | Туре      | Beam   | Current Draw                |   |
|----------|-----------|--------|-----------------------------|---|
| JPW1640  | Port      | 112.5° | 0.08A @ 13.8V / 0.18A @ 28V |   |
| JPW1641  | Starboard | 112.5° | 0.12A @ 13.8V / 0.20A @ 28V |   |
| JPW1642  | Stern     | 135°   | 0.18A @ 13.8V / 0.10A @ 28V | 0 |

#### Narva LED Port and Starboard **Navigation Lights - 1NM**

Surface mount navigation lights, ideal for yachts and powerboats up to 12m.

- · Coloured (red/green) or clear lenses.
- Minimum visible distance: 1 NM @ 112.5°
- Ultra reliable +50,000hrs life.
- Sold as a pair.

Voltage: Multivolt 9-33V



| Lens     | Housing Colour          |   |
|----------|-------------------------|---|
| Coloured | White                   | (   |
| Clear    | White                   |   |
| Coloured | Black                   | (   |
| Clear    | Black                   |   |
|          | Coloured Clear Coloured | Coloured White Clear White Coloured Black |





| N99016BL<br>Clear lenses |  |
|--------------------------|--|
|                          |  |

NARVA

#### **LED Navigation Lights - Deck Mount**


LED port and starboard side lights with black rubber mounting gasket.

· Sold as a pair.

Power Consumption: 0.6W 12V Voltage:

135 x 60 Dimensions (LxWxH):

x 47mm







#### Narva LED Port and Starboard **Navigation Lights - 2NM**

Surface mount bi-colour light, ideal for yachts and powerboats up to 20m.

Minimum visible distance: 2 NM @ 112.5°


• Ultra reliable +50,000hrs life.

Sold as a pair.

Voltage: Multivolt 9-33V



**Housing Colour** N99082BL Black



NARVA

#### **LED Navigation Lights - Deck Mount**

LED port and starboard side lights with black rubber mounting gasket.

- · Minimum visible distance: 2 NM
- · Certified for boats up to 20m.
- · Sold as a pair.

JPW1621

Power Consumption: 1.2W (red)

0.9W (green)

12V Voltage:

Dimensions (LxWxH): 90 x 55 x 35mm



Stainless Steel



JPW1615

#### Narva LED Stern Navigation Lights

This surface mount stern light allows boats up to 50m to operate safely at night. · Minimum visible distance:

2 NM @ 135°


• Ultra reliable +50,000hrs life.

· Sold individually.


Voltage: Multivolt 9-33V

|          |                   | A .                |
|----------|-------------------|--------------------|
| Part No. | Housing<br>Colour | 52                 |
| N99120BL | White             | 80 - 80            |
| N99122BL | Black             | (Dimensions in mm) |
|          |                   |                    |

**J**0 IP67



#### **Hella Marine NaviLED Navigation Lights**






- Multivolt 12/24V.
- Ultra low power consumption.
- Made in New Zealand.
- UV, corrosion and impact resistant.

## **J**0 IP67

#### **NaviLED PRO**

• Pre-wired 2.5m twin core cable.






| Bla      | ck Housing      | White Housing |                 | Tuno      | Min.<br>Visible | Power |             |
|----------|-----------------|---------------|-----------------|-----------|-----------------|-------|-------------|
| Part No. | Hella Code      | Part No.      | Hella Code      | Type      | Distance        | rowei |             |
| H61406   | 2LT 959 900-001 | H61408        | 2LT 959 900-011 | Port      | 2 NM            | 3.2W  |             |
| H61430   | 2LT 959 908-001 | H61432        | 2LT 959 908-011 | Starboard | 2 NM            | 3.2W  |             |
| H61454   | 2LT 959 909-001 | H61456        | 2LT 959 909-011 | Stern     | 2 NM            | 3.2W  | 0           |
| H61502   | 2LT 959 940-201 | H61504        | 2LT 959 940-211 | Masthead  | 3 NM            | 2.5W  | O Bi-Colour |
| H61506   | 2LT 959 940-401 | H61508        | 2LT 959 940-411 | Masthead  | 5 NM            | 4W    | 0           |
| H61434   | 2LT 959 941-001 | H61436        | 2LT 959 941-011 | Bi-Colour | 2 NM            | 3.2W  | <b>Ø</b>    |



#### **NaviLED Compact**

- Pre-wired 120mm single core cable.
- · Minimum visible distance: 2 NM
- · Port and Starboard lights sold in pairs
- Stern and Towing lights sold separately.







Power Consumption: <2W

| Black Housing |                 | Wh       | ite Housing     | Time           | Lens     |   |
|---------------|-----------------|----------|-----------------|----------------|----------|---|
| Part No.      | Hella Code      | Part No. | Hella Code      | Type           | Colour   |   |
| H61570        | 2LT 980 520-801 | H61571   | 2LT 980 520-811 | Port/Starboard | Coloured |   |
| H61554        | 2LT 980 520-501 | H61556   | 2LT 980 520-511 | Stern          | Clear    | 0 |
| H61558        | 2LT 980 520-601 | H61559   | 2LT 980 520-611 | Towing         | Coloured |   |




H61575

#### **NaviLED Deck Mount Port and Starboard**

- Pre-wired 500mm twin core cable.
- Minimum visible distance: 2 NM
- · Sold in pairs.

Power Consumption: <2W





| Bla      | ick Housing     | Wh       | ite Housing     | Type           | Lens<br>Colour |  |
|----------|-----------------|----------|-----------------|----------------|----------------|--|
| Part No. | Hella Code      | Part No. | Hella Code      | туре           |                |  |
| H61574   | 2LT 980 620-801 | H61575   | 2LT 980 620-811 | Port/Starboard | Coloured       |  |
|          |                 |          |                 |                |                |  |



| Navil FD | TRIO  | Tri Colour | with   | Anchor   | Light |
|----------|-------|------------|--------|----------|-------|
| INAVILLE | 11/10 | III Coloui | AAICII | AIICIIOI | Ligit |

- Pre-wired 400mm triple core cable.
- · Minimum visible distance: 2 NM

Power Consumption: < 3.5W (Port, Starboard and Stern)

 $\bigcirc$ 

< 1.5W (All Round White / Anchor)

| Bla      | ick Housing     | Tuna       |
|----------|-----------------|------------|
| Part No. | Hella Code Type |            |
| H61586   | 2LT 980 650-001 | Tri-Colour |





#### **Hella Marine NaviLED 360° White Anchor Lights**

Ultra-compact and robust surface mount design incorporates Grilamid lens material and corrosion, UV and impact resistant ASA plastic for extreme durability.

• Minimum visible distance: 2 NM

• Ultra low power consumption.



Power Consumption: < 1W

Voltage: Multivolt 9/33V

# Head size

## (Dimensions in mm)

#### **Compact Base**

• Pre-wired with 500mm twin core cable



| В        | lack Base       | White Base |                 | Height |            |
|----------|-----------------|------------|-----------------|--------|------------|
| Part No. | Hella Code      | Part No.   | Hella Code      | (mm)   |            |
| H64805   | 2LT 980 960-001 | H64806     | 2LT 980 960-011 | 70     | $\bigcirc$ |

#### **Fixed Pole**


• Robust fixed pole mount with two counter-sunk holes.



| Black Base |                 | W        | White Base      |      |            |
|------------|-----------------|----------|-----------------|------|------------|
| Part No.   | Hella Code      | Part No. | Hella Code      | (mm) |            |
| H61380     | 2LT 980 960-201 | H61381   | 2LT 980 960-211 | 167  | $\bigcirc$ |
| H61382     | 2LT 980 960-201 | H61383   | 2LT 980 960-211 | 205  | $\bigcirc$ |

#### **Fold Down**

· Light pole can be adjusted through 180° and secured with locking collar.





| E 3 |
|-----|
| III |
|     |
| •   |
|     |

| В        | lack Base       | White Base |                 | Height |   |
|----------|-----------------|------------|-----------------|--------|---|
| Part No. | Hella Code      | Part No.   | Hella Code      | (mm)   |   |
| H61384   | 2LT 980 960-301 | H61385     | 2LT 980 960-311 | 315    |   |
| H61386   | 2LT 980 960-321 | H61387     | 2LT 980 960-331 | 510    | ( |
| H61388   | 2LT 980 960-341 | H61389     | 2LT 980 960-351 | 605    | ( |

#### LED 360° Navigation Lights

2 nautical miles 12V 360° white LED navigational light recommended for use on boats up to 12 metres.

• Black nylon or stainless steel base.

• Flat or rounded head with anodised aluminium shaft.






| Part No. | Light Type | Base Type       | Height (mm) |            |
|----------|------------|-----------------|-------------|------------|
| JPW1623  | Flat       | Black Nylon     | 100         | $\bigcirc$ |
| JPW1633  | Flat       | Stainless Steel | 100         | $\bigcirc$ |



| Part No. | Light Type | Base Type   | Height (mm) |   |
|----------|------------|-------------|-------------|---|
| JPW1625  | Flat       | Black Nylon | 225         | C |
| JPW1602  | Round      | Black Nylon | 265         | C |
| JPW1626  | Flat       | Black Nylon | 600         | C |

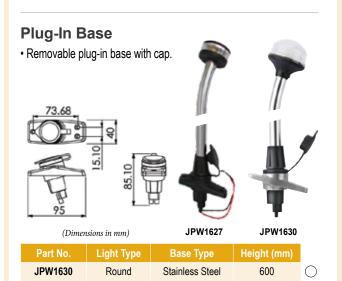

Black Nylon

1065

 $\bigcirc$ 

JPW1627

Flat

#### Narva LED Plug-in Telescopic White Anchor Light

Removable telescopic anchor light, ideal for boats up to 50m, designed specifically for vessels without a canopy.

• Minimum visible distance: 3 NM @ 360°

• Ultra reliable +50,000hrs life.

Voltage: Multivolt 9-33V







NARVA

Plug-in base

| Part No. |  |
|----------|--|
| N99144BL |  |

883 - 1,543

Height (mm) Housing Colour Black

## NARVA

Base

#### Narva LED All Round 360° White Anchor Light

Fixed all round anchor light for boats up to 50m.

- Minimum visible distance: 3 NM @ 360°
- Ultra reliable +50,000hrs life.

Voltage: Multivolt 9-33V





| Part No. | Height (mm) | Housing Colour |
|----------|-------------|----------------|
| N99146BL | 65          | Black          |



NARVA

#### Narva LED Fold Down White Anchor Lights

This fold down anchor light is ideal for boats up to 50m and can be folded out of the way when not in use.

• Minimum visible distance: 3 NM @ 360°

• Ultra reliable +50,000hrs life.

Voltage: Multivolt 9-33V





| Part No. | Height (mm) | Housing Colour |   |
|----------|-------------|----------------|---|
| N99140BL | 203         | Black          | ( |
| N99142BL | 304         | Black          | ( |

#### **Narva LED Surface Mount Dock Light**


NARVA


Fully sealed white dock light mounted above the water to illuminate the area in front of the vessel and assist with visibility when mooring.

- · Provides a smooth spread of light.
- 3 x 1W White LEDs.
- Includes 600mm of cable
- Ultra reliable +50,000hrs life.

Voltage: Multivolt 9-33V







#### Narva LED Masthead and **Foredeck Navigation Light**


Provides approved masthead function with additional foredeck illumination, ideal for boats up to 20m.

- · Flexible mounting wings for mounting on a variety of mast profiles.
- · Minimum visible distance: 3 NM @ 225°
- Ultra reliable +50,000hrs life.

Voltage: Multivolt 9-33V



Part No. **Housing Colour** N99104BL Black



NARVA

Foredeck light

NARVA

#### **Narva LED Masthead Navigation Light**


Surface mount navigation light provides approved masthead function, ideal for boats up to 12m.

- Minimum visible distance: 3 NM @ 225°
- Ultra reliable +50,000hrs life.

Voltage: Multivolt 9-33V



Housing Colour Part No. N99106BL White



#### Narva LED Underwater Lights


NARVA

Powerful surface mount underwater lamp with specially designed heat sink that increases output. Can be used above or below waterline, however not suitable for permenantly moored vessels.

- 3 x 10W White LEDs.
- Includes 600mm of cable
- Ultra reliable +50,000hrs life.

Voltage:

Multivolt 9-33V





N99202BL



| Part No. | Light Colour | Housing Colour |            |
|----------|--------------|----------------|------------|
| N99202BL | Blue         | White          | $\bigcirc$ |
| N99204BL | White        | White          |            |


#### **Hella Marine Apelo Underwater Boat Lights**

Create intense white and vibrant blue or unlimited RGB coloured underwater lighting at your fingertips. Surface mounted and manufactured from an ultra-durable, corrosion resistant material, these lights are dry running protected and suitable for use in and out of water.

· High-strength, UV-resistant Grilamid lens.

- Reliable illumination and lamp protection.
- Completely sealed and electronically protected.
- Wide 90° horizontal spread of illumination.
- Pre-wired 2.5m tinned marine cable.
- Designed and manufactured in New Zealand.





#### Apelo A1 White/Blue LED - Polymer Base

· Intense white and incredibly vibrant blue.

· Suitable for hulls of any material.

Power Consumption: 20W

Voltage: Multivolt 9-32V

1800 Lumens:

**Current Draw:** 1.7A @ 12V / 0.9A @ 24V

| Part No. | Hella Code      | Lens Colour |   |
|----------|-----------------|-------------|---|
| H62101   | 2LT 016 145-001 | Charcoal    | 4 |
| H62103   | 2LT 016 145-011 | White       | 4 |





White Lens

#### Hella Code **Lens Colour** H62108 2LT 016 146-001 Charcoal White H62110 2LT 016 146-011





#### Apelo A2 White/Blue LED - Aluminium Base

- Intense white and incredibly vibrant blue with white edge lights.
- Suitable for aluminium, fiberglass, timber and composite hulls.

Power Consumption: 30W

Multivolt 9-32V Voltage:

3000 Lumens:

**Current Draw:** 2.5A @ 12V / 1.3A @ 24V



| Part No. | Hella Code      | Lens Colour |   |
|----------|-----------------|-------------|---|
| H62116   | 2LT 016 147-001 | Charcoal    | 4 |
|          |                 |             |   |



| Criui | coui | Lens |  |
|-------|------|------|--|
|       |      |      |  |
|       |      |      |  |

| Apelo A2 RGB   |     | Change | LED |
|----------------|-----|--------|-----|
| - Aluminium Ba | ase |        |     |

Multivolt 9-32V

- Full RGB control with white edge lights.
- Suitable for aluminium, fiberglass, timber and composite hulls.

Power Consumption: 30W

H621

- Polymer Base

· Lighting Mode: Full RGB control.

· Suitable for hulls of any material.

Power Consumption: 30W

Voltage:

**Current Draw:** 

Multivolt 9-32V Voltage: **Current Draw:** 2.5A @ 12V 1.3A @ 24V



| No. | Hella Code      | Lens Colour |          |
|-----|-----------------|-------------|----------|
| 22  | 2LT 016 148-001 | Charcoal    | <b>⊗</b> |



#### Apelo A3 White/Blue LED - Bronze Base

- · Intense white and incredibly vibrant blue with white edge lights.
- Suitable for steel, fiberglass, timber and composite hulls.

Power Consumption: 70W

Multivolt 9-32V Voltage:

6000 Lumens:

**Current Draw:** 5.9A@ 12V / 2.9A@ 24V

|          |                 | ,,          |
|----------|-----------------|-------------|
| Part No. | Hella Code      | Lens Colour |
| H62116   | 2LT 016 830-001 | White       |
|          |                 |             |



White Lens

#### Apelo A2 RGB Colour Change LED - Bronze Base

• Full RGB control with white edge lights.

· Suitable for fiberglass, timber, steel and composite hulls

Power Consumption: 30W

Voltage: Multivolt 9-32V **Current Draw:** 2.5A @ 12V 1.3A @ 24V

Part No Hella Code **Lens Colour** H62127 2LT 016 148-101



#### Apelo A3 RGB Colour Change LED - Bronze Base

• Intense white or full RGB control, with white edge lights.

• Suitable for steel, fiberglass, timber and composite hulls.

| Part No. | Hella Code      | Lens Colour |   |
|----------|-----------------|-------------|---|
| H62133   | 2LT 016 831-001 | White       | 6 |

Power Consumption: 70W

Voltage: Multivolt 9-32V

6000 Lumens:

**Current Draw:** 5.9A @ 12V / 2.9A @ 24V



White Lens


#### **Bluefin LED Surface Mounted Underwater Boat Lights**


The Piranha Series surface mount LED underwater lights boast a compact low profile design and perfect for all types of boats, suitable for transom and side mounting on all hull types. Incredibly simple to install with just one small cable entry hole and 3 mounting screws.

• Reverse polarity protection with in built driver technology and active thermal roll-back.

- · Suitable for use in and out of water (except the P3 which is only suitable for in-water use).
- Typical LED life expectancy +50,000hrs.
- · Over voltage, current, reverse polarity, active thermal protection.
- · Hydro block technology.








Bluefin LED

#### Piranha P3

• Suits boats up to 7m (25ft) in length.

Power Consumption: 20W 12V Voltage: Lumens: 1600 **Current Draw:** 1.2A @ 12V









· Suits boats up to 14m (45ft) in length.

Piranha P6 NITRO

Power Consumption: 40W 12V or 24V Voltage: 3600 Lumens:

**Current Draw:** 3.5A @ 12V / 1.8A @ 24V

| Part No. | Base      | Colour        | 6       | 070            |
|----------|-----------|---------------|---------|----------------|
| 12V      |           |               | 16      | 0_0            |
| JPW12298 | Aluminium | Diamond White |         | 101            |
| JPW12299 | Aluminium | Cobalt Blue   |         | Aluminium base |
| JPW12305 | Bronze    | Diamond White | $\circ$ |                |
| JPW12306 | Bronze    | Cobalt Blue   |         |                |
| 24V      |           |               | ()      | 070            |
| JPW12309 | Bronze    | Diamond White | 0 1     | 000            |
| JPW12310 | Bronze    | Cobalt Blue   |         |                |
|          |           |               |         | Bronze base    |

#### Piranha P12

Part No. JPW12315

JPW12316

JPW12316A

• Suits boats up to 20m (65ft) in length.

**Power Consumption:** 55W

Multivolt 12/24V Voltage:


6800 Lumens: **Current Draw:** 4.6A @ 12V

2.35A @ 24V

Diamond White

Cobalt Blue

Cobalt Blue



| 000 |  |
|-----|--|
|     |  |

Bronze base

#### Piranha P6 Colour Change

Controlled via a simple on/off toggle switch, and allows continuous synchronisation without costly external controllers.

• Suits boats up to 14m (45ft) in length.

**Power Consumption:** 

Voltage: Multivolt 12/24V

2700 Lumens:

**Current Draw:** 4.0A@12V

2.0A @ 24V





| Part No.  | Base      | Colour        | Aluminium bas  |
|-----------|-----------|---------------|----------------|
| JPW12313A | Aluminium | Colour Change | <del>***</del> |

#### Piranha P12 Dual Colour

Bronze

Bronze

Aluminium

Controlled via a simple on/off toggle switch to produce either a bright white light or a blue light, or strobe both colours randomly.

• Suits boats up to 20m (65ft) in length.

**Power Consumption:** 

Multivolt 12/24V Voltage:

6800 Lumens: **Current Draw:** 4.6A @ 12V

| Part No. | Base      | <b>Dual Colours</b> |
|----------|-----------|---------------------|
| JPW12319 | Bronze    | White / Blue        |
| JPW12320 | Aluminium | White / Blue        |

2.35A @ 24V





#### **Bluefin LED Light Switch**

LED on/off momentary light switch supplied with wiring loom.

· Suitable for use with the Bluefin Piranha underwater lights.

| Part No. | Amps |
|----------|------|
| JPW12409 | 20A  |




NARVA

NARVA

#### 360° Bayonet Bulb LED Replacement

LED replacement bulb with bayonet fitting.

Power Consumption: 1.5W 12V Voltage: LEDs:





#### Narva Rechargeable LED Head Lamp - 120 Lumens

A unique detachable head lamp with an integrated magnet features high efficiency COB LEDs that provide five hours operating time. Rechargeable via USB lead and supplied with a 240V adapter.

· Glow in the dark locator.



| Part No. | Lumens |
|----------|--------|
| N71424   | 120    |




#### **LED Waterproof Morse Signalling Torch**

Compact pocket sized, battery-powered LED torch packed in a bright yellow waterproof storage box..

- 100% waterproof and floats.
- 200cd light intensity for over 12 hours.
- Meets ISO18813-2006 standards.
- · Includes spare LED and AA battery.
- SOLAS approved.







#### Narva Rechargeable LED Head Lamp - 250 Lumens

Similar to the version above, this head lamp includes a flood light, spot beam and additional arc shaped flood beam for even more powerful lighting.

- · High efficiency COB LEDs.
- Motion activated sensor.
- · Glow in the dark locator.



Part No. N71426 Spot: 150 / Flood: 250 / Arc: 120

#### 90 IP65

NARVA

NARVA

#### **LED AutoLamps Workshop** Rechargeable Torch

High brightness flood light torch features an additional top torch, rechargeable li-ion battery and micro USB cable, and a 180° 7 position pivoting base design.

- Super strong magnets on base and back.
- · Polycarbonate lens and ABS housing.
- · Clean natural white light.
- Impact and shock resistant.



Voltage: 3.7V 350 (flood) Lumens:

80 (top)

Colour Temperature: 6500°K



Swivel and pivot

hanging hook

Part No. Dimensions W x H x D (mm) JPW11743 190 x 56 x 33.5





#### Narva Colt 1000 Rechargeable **Handheld Spotlight**

This heavy duty rechargeable handheld spotlight featured high powered LEDs, fold away hooks and an adjustable carry strap.

- 6 x 3W LEDs producing 2500 raw lumens.
- 244m beam pattern at 1 lux.
- Includes 240V AC charger.



250 x 120 x 60 N71000

#### Narva Colt 1000 Handheld **Spotlight**

This handheld spotlight features high powered LEDs, providing a crisp spot beam range of up to 285m and a 50% wider beam than the rechargeable model.

- 6 x 6W LEDs producing 4000 raw lumens.
- 285m beam pattern at 1 lux.
- · Super stretchy, curly cord extends to 2.5m.
- Includes 12/24V accessory plug with waterpoof DT connector.





JP66

# **HOW TO ORDER**

Select products from the catalogue or through our website using the product categories or search function. Make note of the part numbers to facilitate ordering.

**ONLINE** 



Login to our website with your customer username & password.

## www.jpwmarine.com.au

If you know our product codes, use the 'Quick Order' form for a speedy checkout.

**PHONE** 



Call us during standard
Western Australian business hours on

(08) 6253 3000 to place order by phone.

**EMAIL** 



Email your order to orders@jpwmarine.com.au

