


HYDRAULIC STEERING FOR OUTBOARD MOTORS




Cylinder construction
Bronze, Brass and Stainless steel

OBKIT1

For Outboards up to single 300HP or dual outboards
Counter-rotating up to 600HP total

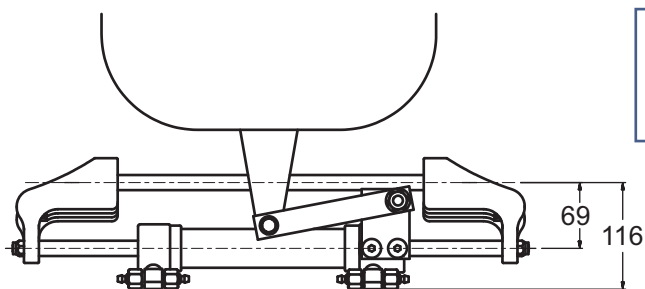


WHEEL TURNS
lock to lock
401 helm = 5.5
402 helm = 4.4

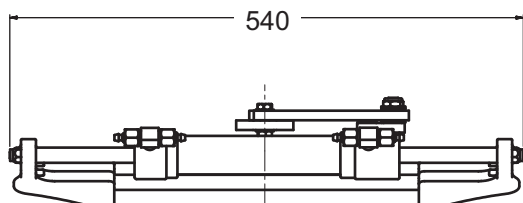

Model 211BH Cylinder dimensions

Capacity:- 154cc
Stroke:- 203mm
Weight:- 5Kg

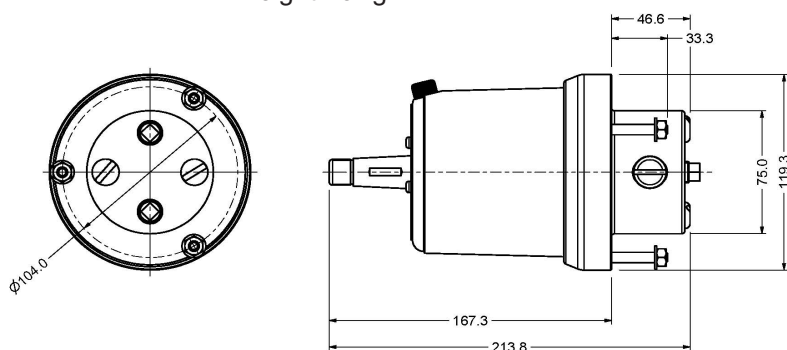

Model 401 and 402 Helm pump dimensions

Model 401 Capacity:-28cc/rev

Model 402 Capacity:-35cc/rev

In-built Lock valve

Maximum working pressure:- 1000psi

Absolute maximum pressure:- 1500psi

Weight:- 5Kg

**See also optional helm choices for front-mount
and tilting helms for this kit**

OBKIT1

Complete Kit comprises:-

Model 401 Helm

Model 211BH cylinder

2 litres ULTRA-15 fluid

15Mtrs 3/8" OD Nylon tubing

Bleeding Kit

All fittings

Installation Manual

Packed weight 15Kg



SIMPLE INSTALLATION TO ANY OUTBOARD**

See steering circuits for multiple outboards and
catamaran installation options.

****For some model Honda and other 4-strokes the
211BH-Honda version is required to avoid interference
on motor cowling.**

HyDrive
HYDRAULIC STEERING