


HYDRAULIC STEERING FOR OUTBOARDS & STERNDRIVES



Cylinder construction
Marine brass and Stainless steel

OBKIT2 & OBKIT3

For Outboards up to single 235HP or dual outboards
Counter-rotating up to 600HP total

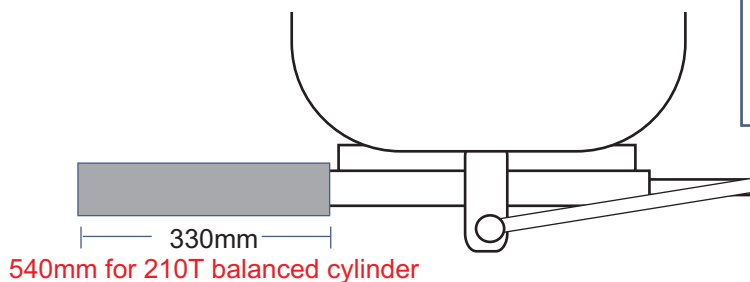

540mm for 210T balanced cylinder

Model 210TSE unbalanced
&
210T Balanced
Cylinder dimensions

Capacity:- 154cc
Stroke:- 203mm
Weight:- 3Kg



WHEEL TURNS
lock to lock
401 helm = 5.5
402 helm = 4.4

OBKIT2

Complete Kit comprises:-
Model 401 Helm
Model 210TN8 cylinder
2 litres ULTRA-15 fluid
15Mtrs 3/8" OD Nylon tubing
Bleeding Kit
All fittings
Installation Manual
Packed weight 12Kg

OBKIT3

Complete Kit comprises:-
Model 401 Helm
Model 210TSEN8 cylinder
2 litres ULTRA-15 fluid
15Mtrs 3/8" OD Nylon tubing
Bleeding Kit
All fittings
Installation Manual
Packed weight 12Kg

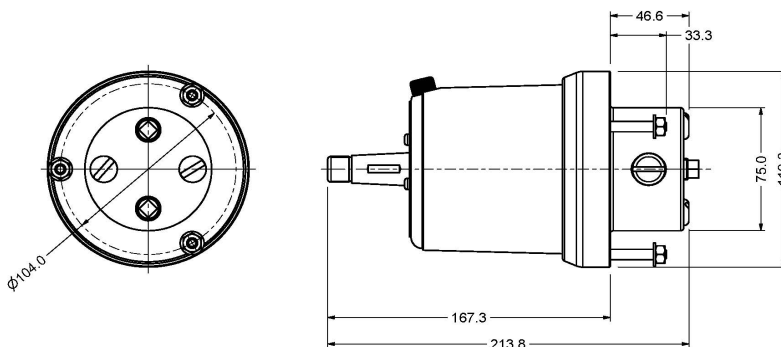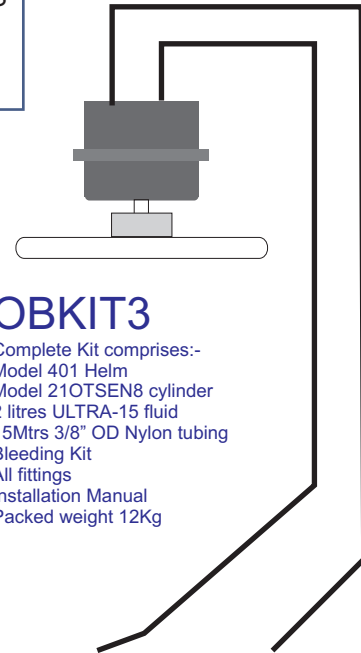

SIMPLE INSTALLATION TO ANY OUTBOARD**
See steering circuits for multiple outboards and
catamaran installation options.

****Unit designed to be used with standard outboard motor drag-link supplied with the engine. Not included in the kit as each outboard manufacturer and model has different drag-link design..**

Model 401 and 402 Helm pump dimensions

Model 401 Capacity:-28cc/rev
Model 402 Capacity:-35cc/rev
In-built Lock valve
Maximum working pressure:- 1000psi
Absolute maximum pressure:- 1500psi
Weight:- 5Kg

See also optional helm choices for front-mount and tilting helms for this kit

HyDrive
HYDRAULIC STEERING