


HYDRAULIC STEERING FOR OUTBOARD MOTORS



Cylinder construction
Bronze, Brass and Stainless steel

OBKIT5

For Outboards up to single 235HP or dual outboards
Counter-rotating up to 400HP total

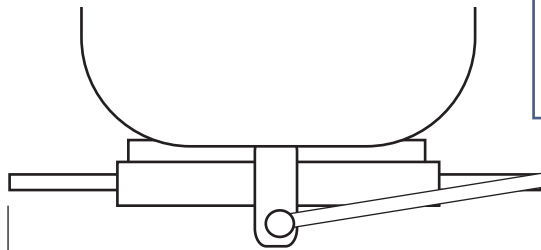


535.5 Mid Stroke Length

737.5 Full Stroke Length

Model 216FM Cylinder dimensions



Capacity:- 137cc
Stroke:- 203mm
Weight:- 5Kg

WHEEL TURNS
lock to lock
401 helm = 4.9
402 helm = 3.9

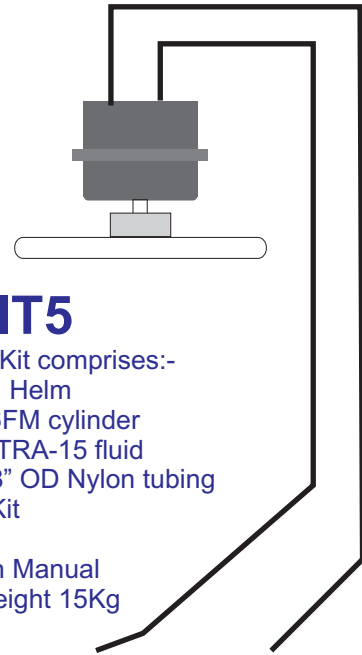

OBKIT5

Complete Kit comprises:-
Model 401 Helm
Model 216FM cylinder
2 litres ULTRA-15 fluid
15Mtrs 3/8" OD Nylon tubing
Bleeding Kit
All fittings
Installation Manual
Packed weight 15Kg

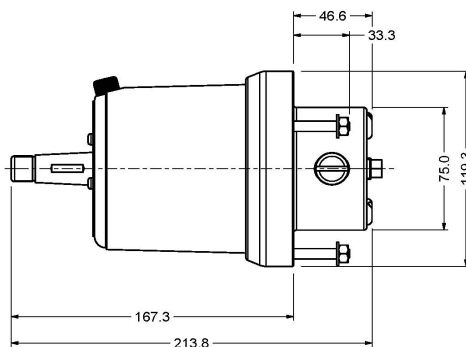

Model 401 and 402 Helm pump dimensions

Model 401 Capacity:-28cc/rev
Model 402 Capacity:-35cc/rev
In-built Lock valve
Maximum working pressure:- 1000psi
Absolute maximum pressure:- 1500psi
Weight:- 5Kg

See also optional helm choices for front-mount
and tilting helms for this kit

SIMPLE INSTALLATION TO ANY OUTBOARD**
See steering circuits for multiple outboards and
catamaran installation options.

**For some model Honda and other 4-strokes the
211BH-Honda version is required to avoid interference
on motor cowling.

HyDrive
HYDRAULIC STEERING