JPW MARINE

HULL, DECK & 04 CABIN HARDWARE

CABIN HARDWARE

Hinges	4.02
Latches and Fasteners	4.03 - 4.04
Barrel Bolts	4.03
Ring-Pulls	4.04
Cupboard & Door Catches	4.05
Vents	4.05
Drink Holders	4.06 - 4.07
Saddle Eye Straps	4.07
Grab Handle & Rails	4.07 - 4.08
Glove Boxes	4.08
Storage Cases	4.09
Phone Mounts	4.09
Tablet Mount Kits	4.09
Scanpod Mounts	4.09

HULL & DECK HARDWARE

DOW ROllers	4. 10 - 4. 11
Bollards	4.12
Fairleads	4.12
Cleats	4.13 - 4.14
Lifting Ring	4.14
Scuppers	4.15
Brackets for Live Bait Tanks	4.15
Fuel Breathers	4.15 - 4.16
Deck Fillers	4.16
Inspection Ports	4.17
Deck Plates	4.18
Bungs & Bases	
Hawse Pipes	4.19
Trim Rings & Slop Stoppers	4.19
Canopy Fittings	4.22 - 4.24
Rail Fittings	4.25
Flag Pole & Antenna Bases	4.25 - 4.26
Boat Rego Numbers and Letters	4.26
Telescopic Ladders	4.27 - 4.29
Folding Step	4.30
Transducer Brackets & Covers	4.14
Davits	4.30
Radar Deck & Mast Mounts	4.31
StopGull Air Seagull Deterrent	4.32
StopGull Air Supports	4.32- 4.33





Cast Stainless Steel **Concealed Hinge with Stud**

316-grade smooth polished stainless steel with M6 fixing studs.

Part No.	Dimensions L x W (mm)	Fixing Studs
JPW19178	94 x 49	M6
JPW19179	76 x 40	M6



Square Butt Hinges -Cast Stainless Steel

- Cast 316-grade heavy duty stainless steel.
- · Sold individually.
- Four 5mm countersunk fastening holes.

Part No.	Dimensions L x W (mm)
JPW19082	38 x 38
JPW19112	50 x 50



Cast Stainless Steel Concealed Door Hinge with Stud

316-grade smooth polished stainless steel with M6 fixing studs.

L x W (mm)	Fixing Studs
70 x 40mm	M6
72 x 65mm	M6
83 x 65mm	M6
	70 x 40mm 72 x 65mm



Door Hinges -Cast Stainless Steel

- · Cast 316-grade heavy duty stainless steel.
- 3mm thick and highly polished.
- Sold individually.
- · Five 5mm countersunk fastening holes.

Part No.	Dimensions L x W (mm)
JPW19083	56 x 38
JPW19115	76 x 38





Cast Stainless Steel External Hinge with Stud

316-grade smooth polished stainless steel with M6 fixing studs.

Part No.	Dimensions L x W (mm)	Fixing Studs
JPW19191	84 x 45	M6
JPW19192	69 x 35	M6



10mm Offset Hinges -Cast Stainless Steel

Cast 316-grade heavy duty stainless steel.

- · Sold individually.
- · Five 5mm countersunk fastening holes.

Part No.	Dimensions L x W (mm)
JPW19113	57 x 38
JPW19114	70 x 38





Cast Hinges - Stainless Steel

316-grade heavy duty stainless steel.

- · Sold individually.
- 5mm countersunk fastening holes.



Part No.	Dimensions L x W (mm)	Fastening Holes
JPW19080	98 x 23	4 x 5mm
JPW19081	160 x 27	6 x 5mm



Separating Hinge - Stainless Steel

Cast 316-grade heavy duty stainless steel take apart hinge.

- · Sold individually.
- Four 5mm countersunk fastening holes.

Part No.	Туре	Dimensions L x W (mm)
JPW19084	Right	90 x 38
JPW19085	Left	90 x 38





Cast Hinges - Stainless Steel

316-grade heavy duty stainless steel.

- · Sold individually.
- 5mm countersunk fastening holes.

Part No.	Dimensions L x W (mm)	Fastening Holes
JPW19078	76 x 38	6 x 5mm
JPW19079	102 x 38	6 x 5mm



Separating Hatch Hinges - Stainless Steel

Cast 316-grade stainless steel with an in-built stopper to hold the hinge upright.

- Has a removable pin to separate.
- · Sold individually.
- 5mm countersunk fastening holes.

Part No.	Туре	Dimensions L x W (mm)
JPW19117	Straight	75 x 56
JPW19118	Angled	82 x 76








JPW19118

Toggle Adjustable Hatch Latches -Stainless Steel

Adjustable toggle latch 316-grade stainless steel with cam action lever. Length adjusts by turning threaded bolt.

• 5mm countersunk mounting holes.






Part No.	Dimensions (mm)			
	A (max)	B (min)	С	D
JPW4700	75	65	10	26
JPW4703	95	85	10	26
JPW4701	125	115	15	36

Anti-Rattle Hatch Fastener -Stainless Steel

Lever action, silent anti-rattle type with an eye for a padlock. Heavy duty cast 316-grade stainless steel.

• 5mm countersunk fastening holes.





Hatch Fastener Eye Lock Cast 316-Grade Stainless Steel

Cast 316-grade stainless steel hatch fastener flat mounting with eye for a padlock.

- Bolt down area size: 70 x 29mm.
- 4mm countersunk fastening holes.

JPW4695

Part No.	Dimensions L x W (mm)
JPW4707	90 x 29



Heavy Duty Swivel Latch - Stainless Steel

Heavy duty, highly polished 316-grade stainless steel door latch with spring loaded locking pin to secure in place.



(Dimensions in mm)

Hasp and Staple Swivel Lock Latches - Stainless Steel

Very heavy duty cast 316-grade stainless steel with highly polished finish.

- Rotatable staple to lock hasp in place.
- Suitable for padlocks up to 8mm.
- 5mm countersunk fastening holes.

Part No.	Dimensions L x W (mm)
JPW4698	76 x 25



Hasp and Staple Latches - Stainless Steel

Pressed 316-grade stainless steel hasp and staple latches with rotatable staple to lock the hasp in place or standard fixed eye.

- Suitable for padlocks up to 8mm.
- 5mm countersunk fastening holes.



Part No.	Туре	Dimensions L x W (mm)
JPW4702	Swivel Lock	70 x 25
JPW4704	Fixed Eye	70 x 25

Locking Hasp Latch -Stainless Steel

304-grade stainless steel with lockable hasp

- 29 x 41mm base area behind lock.
- · Seven 4mm countersunk fastening holes.

Part No.	Dimensions L x W (mm)
JPW4697	76 x 30



Barrel Bolts - Stainless Steel

Highly polished heavy duty cast 316-grade stainless steel barrel bolts.

5mm countersunk fastening holes.

Part No.	Dimensions L x W (mm)
JPW4691	90 x 38
JPW4693	108 x 38




Barrel Spring Bolt - Black Nylon

Non-corrosive nylon spring-loaded barrel bolt.

· Ideal for marine applications.








Flush Hatch Latches - Stainless Steel

Heavy duty 316-grade stainless steel hatch latch pull handle.

• The locking arm is height adjustable.



Dout No.	Dimensions (mm)				
Part No.	ΑØ	ВØ	С	D	Е
JPW19048	60	50	37 - 70	15 - 25	74
JPW19049	90	76	37 - 70	8 - 30	74

Cast Stainless Steel Hatch Ring-Pull

316-grade heavy duty stainless steel hatch latch pull handle. The locking arm is height adjustable and secured with a stainless steel set screw.

• Set the height adjuster between 30-100mm.



Flush Slam Latch - Stainless Steel


Cast 316-grade stainless steel flush mounting, low profile and self-latching; ideal for galley doors and drawers. Lift ring with spring return and 1mm spacer ring.

- Door Thickness: 11-20mm.
- 50mm cut-out diameter.

Part No.

JPW4708






Cast Stainless Steel Ring-Pull with **Spring Return**

Flush pull with spring, cast from 316-grade stainless steel.

- 5mm countersunk fastening holes.
- Depth: 11mm






Cast Stainless Steel Flush Ring-Pull

- Round

316-marine grade stainless steel for long-life performance and durability.

- · 5mm countersunk fastening holes.
- · Overall depth: 11mm






Cast Stainless Steel Ring-Pull

Flush mount ring-pull made from 316-grade stainless steel.

- 5mm countersunk fastening holes.
- Depth: 12mm

Part No. JPW19064





Flush mount ring-pull made from 316-grade stainless steel.

• 5mm countersunk fastening holes.


Stainless Steel Ring-Pull

• Depth: 12mm

Part No.

JPW19070








Cast Stainless Steel Ring-Pull

- Heavy Duty

Heavy duty cast 316-grade stainless steel flush mount ring-pull.

- 5mm countersunk fastening holes.
- Depth: 9mm





4.04

Cupboard Catch -White Nylon

Made from impact-resistant UV-stabilised plastic.



Part No.	Catch Base H x W (mm)	Post Base L x W (mm)
JPW5493	27 x 20	24 x 28

6 Louvre Vents - ABS Plastic Strong UV-stabilised ABS plastic vents with rounded corners.

• Six 5mm countersunk fastening holes.



Part No.	Colour	Dimensions L x H (mm)
JPW1230	Black	260 x 125
JPW1231	White	260 x 125

Magnetic Door Catch -Stainless Steel

Extremely strong magnet holds door from swinging.

- · Cast 316-grade stainless steel.
- · Rubber cover for soft close.

Part No.	Catch Base L x W (mm)	Ball Base L x W (mm)
JPW4687	45 x 26	34 x 18

Louvre Vents with Serration - Nylon

UV-resistant nylon with a serration across the centre so it can be made into two smaller vents.

- Two 6 louvres per vent.
- Twelve 8mm countersunk fastening holes.



Part No.	Colour	Dimensions L x H (mm)
JPW1235	White	256 x 118
JPW1236	Black	256 x 118

Blower Vents - ABS Plastic

Louvre ventilators made from ABS plastic with a hose tail end for connection to 75mm bilge blower exhaust outlet hose.

• Four 8mm countersunk fastening holes.

Part No.	Colour	Dimensions L x W x H (mm)
JPW1237	White	90 x 90 x 50
JPW1238	Black	90 x 90 x 50

Louvre Vents - Stainless Steel

Made from pressed 316-grade stainless steel with a mirror-polished surface and low-profile design for a slimline look.

• 1mm thick plate.







JPW1243	

JPW1244

	JF	**	124	
_	4			

Part No.	No. Louvres	Dimensions L x W (mm)	Fastening Holes
JPW1241	3	127 x 65	6 x 4mm
JPW1242	14	127 x 227	12 x 4.5mm
JPW1243	12	232 x 115	10 x 4mm
JPW1244	6	127 x 115	6 x 4mm

Flush Mount Vents - Nylon


ABS plastic flush mount louvre vents.

- Suitable for lockers, doors, cupboards, etc.
- Four 8mm countersunk fastening holes.

Part No.	Colour	Dimensions L x W (mm)
JPW1239	White	85 x 85
JPW1240	Black	85 x 85

Mini Clam Vents - Stainless Steel

Commonly used as anchor well drain covers or for covering thru-transom wiring connections.



Part No.	Dimensions L x W x H (mm)	Fastening Holes (mm)
JPW1245	43 x 42 x 10	3 x 3
JPW1246	57 x 55 x 13	3 x 3.75

Louvre Vents Stainless Steel

Durable V-style or flat style louvre vents.





JPW1249

Part No.	No. Louvres	Dimensions L x W (mm)	Stainless Steel Grade
JPW1248	4	265 x 112 x 26	304-grade
JPW1249	5	327 x 112 x 26	304-grade
JPW1254	10	527 x 76 x 26	316-grade

Recessed Drink Holder - Plastic

Black plastic large recessed drink holder

• Moulded drain outlet to suit 10mm hose.



Part No.	O.D (mm)	I.D. (mm)	Cut-Out (mm)	Height (mm)
JPW3867	110	90	92	83

Drink Holder with Drain -Polished Stainless Steel

Polished 316-grade stainless steel drink holder with moulded drain hose barb and rubber base insert.



· Packaged for pegboard display.



Part No.	O.D (mm)	I.D. (mm)	Cut-Out (mm)	Height (mm)
JPW3862	108	90	92	83

Drink Holder with Drain -Brushed Stainless Steel

Brushed 316-grade stainless steel drink holder with drain hole and rubber base insert.

• Includes a foam seal with double sided tape under top lip for easy installation.



Part No.	O.D (mm)	I.D. (mm)	Cut-Out (mm)	Height (mm)
JPW3868	108	90	92	83

Drink Holder Large Twin Size Carbon Print with Drain

Plastic drink holder with carbon print and stepped base to hold a variety of sized drink containers.

 Removable rubber plugged drain with moulded outlet to suit 10mm hose.



Part No.	O.D (mm)	I.D. (mm)	Cut-Out (mm)	Height (mm)
JPW3872	108	88	92	86

Drink Holder with Blue LED Lights and Drain - Stainless Steel

Brushed finish stainless steel with in-built blue LED lights, rubber base insert and drain.



Part No.	O.D (mm)	I.D. (mm)	Cut-Out (mm)	Height (mm)
JPW3871	108	90	92	83

Folding Drink Holders Adjustable with Extendable Arms

Made from sturdy ABS plastic. Mounts easily to any vertical surface and folds up near flat after use - protrudes only 23mm when folded.

• Adjustable arms extended 75mm to 165mm.

• Four 5mm countersunk fastening holes.

Part No.	Colour	Dimensions L x W (mm)
JPW3863	White	95 x 97
JPW3864	Black	95 x 97



JPW3863

JPW3865

Folding Drink Holders Adjustable with Flip-up Ring

Mounts easily to any vertical surface and folds up near flat after use - protrudes only 23mm when folded.

- Made from sturdy ABS plastic.
- Three 5mm countersunk fastening holes.

Part No.	Colour	Dimensions L x W (mm)
JPW3865	White	105 x 115
JPW3866	Black	105 x 115



Folding Drink Holder - Stainless Steel

Stainless steel folding drink holder with adjustable arm grips.

- Foam coaster on base.
- Black PVC mouldings and retainers.
- Protrudes out 21mm when closed.

Part No.	Dimensions L x W (mm)
JPW3869	102 x 98



Folding Rail Mount Drink Holder - Stainless Steel

316-grade stainless steel folding drink holder with an adjustable arm grips. The rail mount bracket can rotate 360° and will suit horizotal or vertical rails (25mm diameter).

- · Foam coaster on base.
- Black PVC mouldings and retainers.

Part No.	Dimensions L x W (mm)
JPW3873	105 x 97



Side Mount Ring Drink Holder - Stainless Steel

Stylish ring drink holder made from polished 316-grade stainless steel.

• Side mount plate with two 5mm countersunk fastening holes.



Part No.	Height (mm)	Width (mm)	Ring I.D. (mm)
JPW3858	110	130	90

Single and Double Ring Drink Holders -Stainless Steel

Stylish ring drink holders made from polished 316-grade stainless steel.

• Surface mount - fastens from below with 1/4" thread (screws and washers not included).



Part No.	Туре	Height (mm)	Width (mm)	Ring I.D. (mm)
JPW3860	Single	70	105	90
JPW3861	Double	70	210	90

Saddle Eye Straps -Stainless Steel

316-grade stainless steel saddle eye strap with countersunk fastening holes.



Part No.	Dimensions L x H (mm)	Fastening Holes (mm)
JPW19166	53 x 17	2 x 4
JPW19167	63 x 20	2 x 5
JPW19168	67 x 53	2 x 6

Grab Handle - Black Nylon

Non-corrosive nylon grab handle with two 5mm countersunk fastening holes.



Grab Handle Stainless Steel

Heavy duty cast 316-grade stainless steel with four 5mm countersunk




Stud Mount Hand Rails - Stainless Steel

Polished 316-grade stainless steel hand rail with flange and 8mm BSW studs.



JPW4730 250 x 60 JPW4731 335 x 60 JPW4732 440 x 60	Part No.	Dimensions L x H (mm)
JPW4732 440 x 60	JPW4730	250 x 60
	JPW4731	335 x 60
100 00	JPW4732	440 x 60
JPW4733 490 x 60	JPW4733	490 x 60



Viper

Viper

Stud Mount Hand Rails - Stainless Steel

Polished 304-grade stainless steel hand rail with non-flanged 6mm studs.



Part No.	Dimensions L x H (mm)	1
JPW4735	300 x 50	19.5mm ((Rail Diameter)
JPW4736	450 x 50	↓
JPW4737	600 x 50	← 24.5mm →

Stud Mount Hand Rail

- Stainless Steel

Polished 316-grade stainless steel hand rail supplied with heavy duty stainless steel washers and nyloc bolts.



Stud Mount Hand Rail with Support Leg - Stainless Steel

Polished 316-grade stainless steel hand rail supplied with heavy duty stainless steel washers and nyloc bolts.



Part No.	Length (mm)
JPW4739	1455



Narva Hand Rail Chrome NARVA Polished with LED Light Fully sealed, water resistant premium hand rail with LED light provides effective illumination matched with sophisticated styling. **Current Draw: 0.13A @ 12V** Voltage: Colour Temp: 5700°K

Glove Box - Standard

Part No.

N87605

Strong, lightweight glove box with stainless steel hinge pins and lock.

· Supplied with pre-installed lock, two keys and four countersunk mounting screws.

Dimensions L x W x H (mm)

330 x 70 x 45



Part No.	Door Size (mm)	Depth Behind Dash (mm)	Cut-out Size (mm)
JPW5153	340 x 140	155	300 x 100
JPW5156	Replacement Lock and Two Keys		

Glove Box with Drink Holders

Lockable glove box with textured finish. Strong guad hinged front cover complete with two folding drink holders. Cup holders suit standard cans and bottles and adjust to smaller containers.

· Complete with lock set fitted, two keys and six stainless steel fastening screws.



Part No.	Door Size (mm)	Depth Behind Dash (mm)	Cut-out Size (mm)
JPW5154	340 x 140 155 300 x 100		300 x 100
JPW5156	Replacement Lock and Two Keys		


Storage Cases - White ABS Plastic


A range of white ABS plastic recessed boxes ideal for use as recessed storage pockets in a dry or covered area.


• Can be used for storage, transom shower holders, battery isolator enclosure and a variety of other uses.




Part No.	Туре
JPW1259	Open Pocket
JPW1260	Open
JPW1263	With Door







Type



Storage Hatch Door - Stainless Steel

Made from 316-grade stainless steel, fully seam welded, hand linished and hand polished to a mirror finish.

- · Stainless steel pull handle with integrated lock and keys.
- · Flush-mount.



Part No.	Cut-out W x H (mm)	Overall L x W (mm)
JPW12828	380 x 290	420 x 330

Hatch Holder Springs - Stainless Steel

Holds hatches open and close easily, the ends pivot and rotate for different mounting positions.



Part No.	Length (mm)
JPW19256	210
JPW19257	260

Scanstrut ROKK Mini Mounts

Compact and multi-adjustable mounting system for smartphones, tablets, small fish finders, digital and action cameras and more.

- · For devices up to 1.2kg.
- · Each part sold separately.





.IPW10485

SCANSTRUT



3 JPW10487



JPW10486

Complete assembly (phone not included)

SCANSTRUT

Part No.	Description
JPW10472	Phone Clamp Top Plate
JPW10485	360° Adjustable Body
JPW10486	Screw Down Base
JPW10487	Self-Adhesive Base

Scanstrut Scanpods Deck Mounts

Install your multi-function display device on virtually on any flat surface on board.

- UV and heat resistant seals made from high tear strength silicone.
- 360° viewing angle swivel and tilt
- · Added strength with inner bracing plate.
- · Overhead mounting optional.
- · Supplied uncut.

Part No.	Dimensions L x W x D (mm)
JPW10519	324 x 228 x 167
JPW10520	374 x 243 x 167
JPW10528	467 x 387 x 183



SCANSTRUT

SCANSTRUT.

Scanstrut Scanpods Helm Rail Mounts

The saddle system supports the stainless tubing enabling a secure and rigid fit onto pedestal rails from 25mm to 33.7mm diameter.

- UV and heat resistant seals made from high tear strength silicone.
- · Secure and watertight installation.
- · No drill fixing kit included.
- · Supplied uncut.

Part No.

JPW10524

JPW10525



374 x 243 x 167



Scanstrut ROKK Mini **Tablet Mount Kits**

A tough, compact and multi-adjustable mounting systems for tablets, small fish finders and other digital devices.

- Ratchet adjustable tablet clamp top plate.
- 360-degree adjustable aluminium body.
- Screw down, rail mount or suction cup base.
- · Secure metal-on-metal locking system.

Screw Down Base

- · Fits any flat surface.
- · Tough, marine-grade, UV stable materials.

Part No. JPW10476



Rail Mount Base

- · Fits a wide range of rails from 19mm - 34mm
- Includes 3 x soft rail grip pad inserts for the perfect fit

Part No. JPW10477



Suction Cup Base


- · Fits to any rigid, clean, smooth, non-textured surface.
- · Tough, marine-grade, UV stable materials.


Part No. JPW10480




Bow Rollers - Polyurethane

To suit bow sprits, these outlast conventional rollers, are less abrasive and reduce any noise when in use.












Davi No.	Don't No.		Dimensions (mm)					
Part No. Type	Туре	Α	В	С	D			
JPW4111	2" Bow Roller	50	50	13	13			
JPW4211	3" Bow Roller	75	70	17	27			

Small Bow Roller - Aluminium

Small bow roller made from cast aluminium.


• Suitable as a weld-on bow roller for aluminium boats.



Bow Rollers - Polyethylene

Hard durable, high density polyethylene (HDPE) rollers are lightweight and impact resistant. High quality and notably quiet.






Part No.	Colour	Dimensions (mm)					
rait NO.	Colour	Α	В	С	D		
JPW4213	Red	74	70	17	27		
JPW4214	Blue	74	70	17	27		

Small Bow Roller - Stainless Steel

Small 304-grade heavy duty stainless steel fixed bow roller.

• Three 9.5mm fixing holes and black roller.




Viper Pro Deluxe Anchor Rollers

Viper

316-grade stainless steel anchor rollers made from 5mm plate, hand polished to a mirror finish.

- Stainless steel bolts, nuts and washers provided.
- 2x 8mm pre-drilled mounting holes.




Part No.	Tuno	Dimensions (mm)							
Pail NO.	Type	Α	В	С	D	Е	F		
JPW12834	Small	130	105	50	100	70	53		
JPW12835	Large	205	105	50	175	105	53		

Cast Stainless Steel Bow Rollers

Cast 316-grade stainless steel bow rollers finished to a high polish.

- Saddle strap to retain anchor and rode during recovering anchor.
- Designed for use with Danforth anchors, Delta/Fixed Head anchors, Plough anchors and Claw anchors.




Part No.	Suits Anchor	Dimensions (mm)						
Part No.	Size (kg)	Α	В	С	D			
JPW4221	10	380	196	67	261			
JPW4222	15	480	240	75	300			
JPW4223	20	590	235	78	340			
JPW4224	30	590	240	78	340			

Bow Roller - Stainless Steel

316-grade stainless steel bow roller with spring loaded removable retaining pin and single stainless steel roller assembly


· Highly polished finish.





• Spring loaded retaining pin

· Single roller assembly.




Dort No.	Dimensions (mm)							
Part No.	Α	В	С	D	Е	F	G	
JPW4099	70	280	175	50	30	62	18	


Self-Launching Bow Rollers - Stainless Steel

Heavy duty marine-grade stainless steel. Designed for use with Delta/Fixed Head anchors and Rocna Original, Vulcan and Fisherman anchors.

• 2x white anchor guide rollers.

· Suit rope size 6mm or larger.






Part No.					Suits Anchor Size (kg)			
Part No.	A	В	С	D	Delta	Rocna	Fisherman	
JP	W4231	225	415	76	150	6-10	4-6	4-6
JP	W4232	390	585	80	265	10	4-10	4

Viper Pro Deluxe Single Bow Roller

Viper

Made from 5mm 316-grade stainless steel, this roller is self-launching and suitable to fit almost any anchor. Allows for free falling, correct alignment upon retrieval and reduces rope chafe.



Part No. JPW12832


Viper Pro Deluxe 3 Roller **Bow Rollers**

Self-launching and designed to fit most plough anchors. Made from 5mm plate 316-grade stainless steel, polished to a mirror polish.

(Dimensions in mm)

· Safety loop to stop rope from sliding over.

• 3x high performance nylon rollers.



Part No.		Dimensions (mm)						
Fait No.	Α	В	С	D	Е	F	G	Н
JPW12830	370	240	210	70	210	153	90	30
JPW12831	495	290	255	95	350	182	175	42

Cross Bollards - Aluminium

Cross bollards made from cast marine-grade aluminium alloy.

• Can be welded and fastened to deck or drilled out and screwed into position.



Part No.	Base Dimensions L x W (mm)	Height (mm)
JPW4247	60 x 60	76 (3")
JPW4248	88 x 75	100 (4")
JPW4249	88 x 88	155 (6")

Cross Bollard - Aluminium

Australian made cast marine-grade aluminium bollards that can be welded or fastened to a deck.

• 8mm thick base.



Part No.	Base Dimensions L x W (mm)	Height (mm)
JPW4250	97 x 73	100 (4")

Cross Bollard - Stainless Steel

Heavy duty 316-grade stainless steel cross bollard, designed to fit on most small to large boats.

- · Polished finish for a great looking
- Four 4.5mm fastening holes.



Part No.	Base Dimensions L x W (mm)	Height (mm)
JPW4252	60 x 60	80 (3")

Horn Bollards - Stainless Steel

Quality mirror-polished 316-grade stainless steel bolt-thru style, attached from underneath the cleat.

- · Ideal for larger yachts and cruisers.
- · Robust construction for the use of large ropes.
- · Use as a fairlead or stern chock.



Part No.	Base Dimensions L x W (mm)	Height (mm)	Hole Centres (mm)	Max Rope Dia (mm)
JPW4243	158 x 58	60	70	45
JPW4244	200 x 68	66	80	60
JPW4245	233 x 70	80	90	60

Split Bollards

Cast 316-grade stainless steel split bollards with or without pin, allows for securing the chain into the bollard.

• Polished finish and gentle rake.





JPW4216 / JPW4218

Part No.	Base Dimensions L x W (mm)	Height (mm)	Chain Size (mm)	Pin
JPW4215	60 x 60	84	8 - 10	No
JPW4216	60 x 60	84	8 - 10	Yes
JPW4218	85 x 85	115	10 - 13	Yes

Fairleads Straight (Bow Chock) -Stainless Steel

- Cast 316-grade stainless steel with a highly polished finish.
- Two 6mm fastening holes.
- · Sold individually.



Part No.	Dimensions L x W (mm)	Hole Centres (mm)	Suits Rope Size (mm)
JPW19019	(5") 127 x 25	103	16
JPW19022	(6") 152 x 25	130	19

Fairleads Stainless Steel (Bow Chock)

Cast 316-grade stainless steel fairleads.

• Sold as pair - port and starboard.





Part No.	Dimensions L x W x H (mm)	Hole Centres (mm)	Suits Rope Size (mm)
JPW19025	(6") 150 x 34 x 32	125	14
JPW19026	(8") 200 x 38 x 38	165	16
JPW19027	(10") 250 x 48 x 40	210	18

Fairleads Heavy Duty Solid Base -Stainless Steel

Cast 316-grade stainless steel fairleads, sold as a pair.

• 6mm countersunk fastening holes.





Part No.	Overall Length (mm)	Max Rope Dia (mm)
JPW19023	152	19



Cast 316-grade stainless steel 'STAR' deck cleat.

• Supplied with two 8mm threaded stud mounting rods, nuts and



Small Low-Profile Cleats - Stainless Steel

Cast 316-grade stainless steel, corrosion-resistant, open-base deck cleat.

· Four 6mm countersunk fastening holes.



Part No.	Top L x H (mm)	Base L x W (mm)	Hole Centres (mm)
JPW19038	(4") 100 x 25	42 x 35	30 x 25
JPW19039	(5") 125 x 28	57 x 47	41 x 30

Large Low-Profile Cleats - Stainless Steel

• Cast 316-grade stainless steel, highly polished cleat.

• Four 6mm countersunk fastening holes.



Part No.	Dimensions L x H (mm)	Hole Centres (mm)
JPW19040	(6") 150 x 30	50 x 42
JPW19041	(8") 200 x 38	57 x 41
JPW19042	(10") 250 x 42	57 x 46
JPW19044	(12") 300 x 55	95 x 50

Slimline Cleats - Stainless Steel

Cast 316-grade stainless steel standard slimline bar open base deck cleat.

• Four hole mounting positions.



Part No.	Dimensions L x H (mm)	Hole Centres (mm)
JPW19028	(4") 100 x 25	48 x 22
JPW19029	(5") 125 x 26	55 x 25
JPW19030	(6") 150 x 30	55 x 26
JPW19031	(8") 200 x 35	75 x 28
JPW19032	(10") 250 x 45	95 x 44

Cleats with Oval Tube - Stainless Steel

Surface mounted oval tube cleats made from 316-grade stainless steel with a highly polished mirror finish.

· Bolt-thru style attached from underneath (bolts not supplied).



Part No.	Top L x H (mm)	Base L x W (mm)	Bolt Size	Hole Centres (mm)
JPW19058	150 x 45	90 x 31	M8	47
JPW19059	200 x 58	120 x 35	M10	69
JPW19060	250 x 80	160 x 50	M16	84

Heavy Duty Cleats - Stainless Steel

Cast 316-grade stainless steel and countersunk mounting holes.



Part No.	Dimensions L x H (mm)	Hole Centres (mm)	Mounting Hole Ø (mm)
JPW19043	(8") 200 x 35	73 x 35	7
JPW19033	(10") 250 x 42	95 x 46	8.5
JPW19034	(12") 300 x 48	100 x 51	8.5

Heavy Duty Weld-On Cleats - Aluminium

Weld-on base cleat available in three sizes.

Designed for the OEM boat builder and long-life service.



Part No.	L x W x H (mm)	Base L x W (mm)
JPW5215	(10") 250 x 37 x 58	113 x 74
JPW5216	(12") 300 x 40 x 67	119 x 87
JPW5217	(13.5") 350 x 45 x 80	150 x 103

Dock Cleats - Cast Aluminium

Heavy duty alloy dock cleats for marinas, wharves, pontoons, etc.

· Solid weld-on base with large opening



Part No.	Top L x H (mm)	Base L x W	Hole Centres	
Two 13mm fastening holes.				
for mooring ro	opes.	1000	M	

Part No.	Top L x H (mm)	Base L x W (mm)	Hole Centres (mm)
JPW4241	290 x 90	180 x 45	105
JPW4242	350 x 105	200 x 72	125

Folding Cleats - Stainless Steel

Heavy-duty cast 316-grade stainless steel low profile folding cleat.

· Indented finger lift for easy retrieval, simply push to fold away to create a flush profile.



Part No.	L x W (mm)	Height Closed (mm)	Height Open (mm)	Mounting Hole Ø (mm)
JPW19050	155 x 54	13.5	47	8
JPW19051	202 x 72	15	62	10

Lifting Ring 150mm Cleat - Stainless Steel

Polished 316-grade stainless steel 150mm cleat with a 25mm hole for securely lifting or tying off.

· Secure by screw down or via internal threaded rod.




Part No.	Length (mm)	Eye Ø (mm)	Hole Cut- Out Ø (mm)	Base Ø (mm)	Internal Thread (mm)
JPW19045	150	25	25	47	15 (UNC)

Flush Pull-Up Cleats - Stainless Steel

Polished 316-grade stainless steel cleat.

· Pulls up from base and sits almost flush on deck when not in use.



Part No.	Dimensions (mm)				
Fait NO.	Α	В	С	D	Е
JPW19013	125	31	50	10	97
JPW19014	150	31	62	10	125
JPW19015	200	46	83	14	155

Aluminium Scuppers

High quality aluminium alloy transom drain scuppers or ventilators.

- · Spring-loaded with strong stainless spring and watertight sealing gasket.
- · Ideal vents for draining the deck of your boat, air pressurising your caravan, van body, or as a vent to allow air to flow in.
- · Repair service kits also available.



JPW4261 / JPW4271 White Powder Coated


Part No.	Туре	Size	L x W (mm)
JPW4260	Plain Aluminium	Small	167 x 112
JPW4261	White Powder Coated	Small	167 x 112
JPW4270	Plain Aluminium	Large	240 x 147
JPW4271	White Powder Coated	Large	240 x 147

Flush Pull-Up Cleats - Polished Stainless Steel

Surface mounted cleat made from 316-grade stainless steel with a highly polished mirror finish.

· Pulls up from base and sits almost flush on deck when not in use.

• Strong stainless steel mounting bolts sit below deck.



(Dimensions in mm)

Part No.	Dimensions (mm)				
Part No.	Α	В	С	D	E
JPW19011	127	32	107	16.5	42
JPW19012	150	36	136	18	44

Aluminium Scupper Repair Kits

Kits contains 1x foam seal and 1x spring.

· Suits Aluminium Scuppers above.







Foam Seal

Part No.	Туре	Suits Scupper Size
JPW4272	Foam Seal and Spring	Small
JPW4273	Foam Seal and Spring	Large
JPW4279	Spare Spring only	Small

Plastic Nylon Scuppers

Spring-loaded with strong stainless spring and watertight sealing gasket.



JPW6263 / JPW6265 White

Par	t No.	Dimensional w W (mm)	
White	Black	Dimensions L x W (mm)	
JPW6263	JPW6262	175 x 120	
JPW6265	JPW6264 240 x 147		
JPW6261	Replacement scupper spring		

Opening Lip

Recess Fuel Breathers -Stainless Steel

This recessed breather provides a flush to hull installation. It can also be used for surface mount installation, by removing the flush mount "cup" and reversing the backing plate.

- Made of cast 316-grade stainless steel.
- Suitable for all types of hull material.

Part No.	Suits Hose (mm)	Туре
JPW19153	16	90° Angle
JPW19154	16	Straight



JPW19154

Recess Fuel Breather - Polished Stainless Steel

316-grade stainless steel recessed fuel breather vent with a 90 degree angled barb

• Additional flange for thinner hulls (3.5mm).

Part No.	Suits Hose (mm)	Туре
JPW19126	16	90° Angle



Water Scoop Bracket for Live Bait Tanks

316-grade stainless steel, solidly constructed bracket ideal for circulating fresh sea water through your bait tank while under way.

Water Scoop Bilge Pump Bracket for

*Pump not included

· Suits 12mm hose.

· Australian made.

Part No. JPW3805

Live Bait Tanks

while under way or stationary.

• Suits old and new Rule 360 and 500 bilge pumps.

place.

Part No. JPW3806

· 'U' shaped clamp to hold pump in

316-grade stainless steel bilge pump bracket with water scoop, for circulating fresh sea water through your bait tank



316-grade stainless steel fuel breather vent, slightly recessed with a straight barb.

Part No.	Suits Hose (mm)	Туре
JPW19124	19	Straight



Fuel Breathers - Stainless Steel

316-grade stainless steel with a round head, suitable for all types of hull material.



Part No.	Suits Hose (mm)	Туре
JPW19151	16	Straight
JPW19152	16	90° Angle
JPW19122	19	90° Angle




JPW19151


www.jpwmarine.com.au

Keyless Deck Fillers - Stainless Steel

Flush mount cast 316-grade stainless deck fillers with a flip-up key to ensure easy removal. Features coarse thread,

'O' ring seal, retaining chain and filler type identification moulded into the lid.








Part No.	Туре	Dimensions (mm)			
		Hose Size (A)	Rim Ø (B)		
JPW19270	Fuel	38	74		
JPW19271	Fuel	50	87		
JPW19272	Diesel	38	74		
JPW19273	Diesel	50	87		
JPW19274	Water	38	74		
JPW19275	Water	50	87		
JPW19262	Replacement Retaining Chain				

Opening Key Deck Fillers - Stainless Steel

High quality heavy duty cast 316-grade stainless steel deck fillers.

· Supplied complete with stainless steel retaining chain, 'O' ring seal and key.







JPW19099 Spare Deck Fill Key

		Dimension	- (mm)	
Part No.	Туре	Dimensior	is (mm)	
		Hose Size (A)	Rim Ø (B)	
JPW19090F	Fuel	38	75	
JPW19093F	Fuel	50	80	
JPW19090	Petrol	38	75	
JPW19093	Petrol	50	80	
JPW19091	Diesel	38	75	
JPW19096	Diesel	50	80	
JPW19092	Water	38	75	
JPW19098	Water	50	80	
JPW19094	Waste	38	75	
JPW19097	Waste	50	80	
JPW19099	Spare Deck Fill Key 38 & 50mm deck fillers.			
JPW19262	Replacement Retaining Chain			

Lockable Fuel Deck Fillers - Stainless Steel

Polished stainless steel fuel deck fillers.

• Includes lock and 2x stainless steel keys.




Replacement Chain





JPW19260 Straight base





JPW19265 Stepped base to suit two hose sizes

Part No.	Suits Hose (A) mm
JPW19260	50
JPW19265	30 and 50

(Dimensions in mm)




Lockable Fuel Deck Filler with 45deg Base

- Stainless Steel

Polished stainless steel fuel deck filler with 45° angled base.

• Includes lock and 2x stainless steel keys.



38







Deck Fillers - Nylon

JPW19267

Universal type fillers featuring a quick and easy opening cap with 'O' ring seal and stainless steel safety chain.

- Supplied with stick-on name plates (Water, Waste, Petrol, Diesel, Fuel and Gas).
- · No tools required for opening; simply turn by hand.

Part No.	Hose Size (mm)
JPW2628	38
JPW2629	50



Manufactured to high tolerances to provide high strength, durability and water-tightness.

· All models include 'O' ring seals.

JPW6036

- Rims and coloured lids are made from ABS plastic.
- Clear lids are made from polycarbonate plastic, to give both high transparency and

• 5" and 6" ports are available with removable kit bags made from woven nylon.							
Part No. Type Cut-Out I.D. O.D. Mounting (mm) (mm) Holes							
White	Black		(mm)	(mm)	(mm)	noies	
JPW6030	JPW6031	4" - Screw-in	110	100	144	6 x 4.5mm	
JPW6032	JPW6033	5" - Screw-in	140	125	170	6 x 4.5mm	
JPW6041	JPW6042	5" - With Kit Bag	140	125	170	6 x 4.5mm	
JPW6034	JPW6035	6" - Screw-in	166	150	194	8 x 4.5mm	
JPW6040	JPW6043	6" - With Kit Bag	166	150	194	8 x 4.5mm	

210

190





JPW6036

Nairn Inspection Port Replacement Lids

8" - Pry Out

· Clear lids are made from polycarbonate plastic, to give both high transparency and impact resistance.

Part No.		Time	O.D		
White	Black	Clear	Type	(mm)	
JPW6060	JPW6055	JPW6050	4" - Lid Only	113	
JPW6061	JPW6056	JPW6051	5" - Lid Only	138	
JPW6062	JPW6057	JPW6052	6" - Lid Only	160	
JPW6063	•	=	8" - Lid Only	200	



6 x 6mm

Spare clear lid to suit Nairn ports

Spare O-Rings

JPW6033 / JPW6035

Part No.	Size
JPW6070	4" (100mm)
JPW6071	5" (125mm)
JPW6072	6" (150mm)
JPW6073	8" (200mm)



Inspection Ports - Full Cover Lid

Made from high density polymer with a textured surface and screw-in threaded lid that covers screw holes.

- Finger grip opening lid with rubber ring to seal with base.
- Six 4.5mm mounting holes.

Part No.		Tuno	Cut-Out	I.D.	O.D
White	Black	Туре	(mm)	(mm)	(mm)
JPW6045	JPW6044	6" - Screw Out	163	152	210

Inspection Ports

Made from ABS plastic, screw-in threaded lid with flush mounted style.

- · Finger grips with rubber ring to seal.
- Six 4.5mm mounting holes.



Part No.		Cut-Out	I.D.	O.D. (mm)	
White	Black	(mm)	(mm)	ט.ט. (וווווו)	
JPW6074	JPW6075	110	102	145	
JPW6076	JPW6077	135	128	170	
JPW6078	JPW6079	160	155	205	

Inspection Port - Smooth Lid

Made from durable UV-resistant ASA white plastic, smooth surface style with screw-in finger grips on lid. Pry-out lid has no finger grip holes.

- · Includes 'O' ring seal.
- Six 4.5mm mounting holes





JPW6046

JPW6047 / JPW6049

Part No.	Туре	Cut-Out (mm)	I.D. (mm)	O.D. (mm)
JPW6047	4" Screw-in	120	100	155
JPW6046	6" Pry-out lid	165	155	205
JPW6048	6" Screw-in	165	150	205
JPW6049	8" Screw-in	210	200	250

Adjustable Opening Key for Deck Plates

Easily open any size deck plate.

Part No.
JPW6059



JPW MARINE

Deck Plates Finger Grip Opening - Stainless Steel

Heavy duty 316-grade polished stainless steel with a handy finger grip opening mould instead of the standard key system.



Part No.	Cut-Out (mm)	I.D. (mm)	O.D. (mm)
JPW19195	87	83	123
JPW19196	110	102	147
JPW19197	135	127	173
JPW19198	162	150	196

Deck Plates - Stainless Steel

Heavy duty 316-grade stainless steel deck plate with mirror polish.

• Rubber 'O' ring seal for a watertight closure.

· Includes opening key.






Part No.	Hole Dia		Outside Diameter	Cut-out Size	
Part NO.	(in)	(mm)	(mm)	(mm)	
JPW19100	4	100	140	110	
JPW19102	5	127	176	136	
JPW19103	6	152	198	162	
JPW19101A	Replacement Key suits 4" Deck Plates				
JPW19101B	Replacement Key suits 5" to 8" Deck Plates				


Aluminium Weld-On Deck Plates with Acetal Lid

Heavy duty marine-grade aluminium weldon base and 20mm thick acetal lid with key holes for opening.

• Rubber 'O' ring seal ensures a watertight seal.








B		Black	Lid		
	Dimensions (mm)				
k Lid	Α	В	С		

Part	No.	Dimensions (mm)		m)
White Lid	Black Lid	Α	В	С
JPW5208	JPW5207	145	(4") 100	118
JPW5210	JPW5209	195	(6") 150	165
JPW5206	JPW5205	245	(8") 200	217

Opening Keys To Suit Weld-on Deck Plates

120

JPW5211



150 and 200

Bomar Waterproof Aluminium Deck Plate

This commercial-grade, heavy-duty aluminium inspection port is 100% waterproof. A flush ring pull latch enables complete removal of the lid.

· Corrosion-resistant aluminium with a non-skid checker plate surface.

- · Thick watertight rubber seal.
- Six 5mm mounting holes.



Part No.	Cut-Out (mm)	I.D. (mm)	O.D (mm)	Height (mm)	
JPW171675	276	223	306	30	

Cast Alloy Tank Filler / Drain Bung with Slotted Cap

Base is cast aluminium that can be welded or screwed to surface.

· Includes rubber 'O' ring seal and white acetal slot cap.



Dimensions (mm)			
A	В	С	
93	55	75	
	A	АВ	




Cast Aluminium Drain Bungs

Cast aluminium drain plug designed to be welded or drilled for screw-in installation. Supplied with rubber 'O' ring seals in the cap.

 Replacement caps are available in aluminium or black acetal.





Part No.	Description -	Dime	ensions ((mm)	
Part No.		Α	В	С	
JPW5213	Cast Alloy Bung & Base	72	45	50	
JPW5214	Cast Alloy Bung with Acetal Plug	60	45	50	
JPW5219	Replacement Aluminium Plug & O-ring 38mm				
JPW5220	Replacement Black Acetal Plug & O-ring 38mm				

HULL, DECK & CABIN HARDWARE

Transom Well Drain 55mm

White nylon fine threaded drain with push-on grip flanged end fitting.

- Can be used for draining motor or anchor wells.
- · Simply cut to length required.

Part No.	Overall Length (mm)	Cut-out (mm)
JPW5420	59	25



Rubber Trim Ring - Oval

Protect wiring and plumbing from chaffing by neatly finishing holes in bulkheads, engine wells, etc.

• Made from soft black PVC plastic to give excellent weather and chemical resistance.



Part No.	Colour	Hole Size L x W (mm)	Cut-Out L x W (mm)	O.D. Total L x W (mm)
JPW5293	Black	115 x 60	120 x 62	135 x 82

Oval Hawse Pipe Flange - Stainless Steel

Oval shape hawse pipe made from cast 316-grade stainless steel.

- Used mainly as a rope guide through the gunwale of larger boats.
- · Highly polished finish.



Part No.	L x W x H (mm)	Cut-Out (mm)	I.D. Hole (mm)
JPW19000	140 x 64 x 25	103 x 46	93 x 37
JPW19001	238 x 135 x 30	190 x 88	175 x 75

Rubber Slop Stoppers - Round

Splash proof round slop stopper boot to prevent damage to cables and hoses in engine wells.

· Soft PVC plastic for excellent weather resistance and long term durability.

45mm intrusion.



Part No.	Colour	Hole Dia (mm)	Cut-Out (mm)	Outside Dia (mm)
JPW5294	White	50	62	90
JPW5300	Black	50	62	90

Rectangle Hawse Pipe Flange -Stainless Steel

Rectangle flange with oval cutout used mainly as a rope guide through the gunwale of larger boats.

• Cast 316-grade stainless steel with highly polished finish.



Part No.	L x W x H (mm)	I.D. Hole (mm)
JPW19002	132 x 63 x 25	90 x 37

Rubber Slop Stopper - Oval

Splash proof oval slop stopper boot that prevents damage to cables and hoses in engine wells, etc.



45mm intrusion



Part No.	Colour	Hole Size L x W (mm)	Cut-Out L x W (mm)	Overall L x W (mm)
JPW5301	Black	115 x 60	120 x 62	135 x 80

Rubber Trim Ring - Round

Protect wiring and plumbing from chaffing by neatly finishing holes in bulkheads, engine wells, etc.

- Excellent weather and chemical resistance.
- · Made from soft PVC plastic.
- 6mm maximum panel thickness.



Part No.	Colour	Cut-Out (mm)	Outside Dia (mm)
JPW5292	Black	65	90

Rubber Bungs - Black

Tapered rubber bungs suitable for use in dinghies and plugging holes between 11mm and 25mm.

Part No.	Hole Size (mm)	Туре
JPW6939	11 - 14	Size 3
JPW6940	16 - 19	Size 7
JPW6941	18 - 21	Size 8
JPW6942	20 - 25	Size 10





Expansion Bung with Snap Release

Black 25mm bung drain made from flexible, durable nylon.

- · Push into tube and snap for a watertight fit.
- Easy-to-use snap handle for release and removal.

Part No.	Hole Size
JPW5411	25mm (1")



Bungs with Snap Handle

Expansion bung expands when handle is pushed down.

Made from nylon.

Part No.	To Suit Hole Size (mm)
JPW5358	25
JPW5359	35
JPW5360	40



Plastic Bung with 22mm Base Cut-Out

Small size drain bung and base, made from UV-resistant marine-grade nylon with fine thread.

- 19mm internal flow size with unique high flow retainer ring design and neoprene 'O' ring seal.
- Two 4mm countersunk fastening holes.
- 19mm bung plug diameter.



Part No.		Description
Single	Bulk Bag of 10	Description
JPW5372	JPW5372B	Bung & Base Assembly

Plastic Bung with 25mm Base Cut-Out - Fine Thread

All plastic with plastic washer and retainer lug.

- Fine thread with 19mm internal flow size.
- Two 4mm countersunk fastening holes.
- 19mm bung plug diameter.



Part No.		Description
Single	Bulk Bag of 10	Description
JPW5391	JPW5391B	Bung & Base Assembly
JPW5390	JPW5390B	Bung Plug only

Plastic Bung with 25mm Base Cut-Out - Coarse Thread

Standard size, coarse thread drain bung. All plastic with plastic washer and retainer lug.

- 17mm internal flow size.
- 19mm bung plug diameter.



Part No.		Description
Single	Bulk Bag of 10	Description
JPW5380	JPW5380B	Bung & Base Assembly
JPW5370	JPW5370B	Bung Plug only

Plastic Bungs with 25mm Base Cut-Out

High quality bung and base made from UV-resistant marine-grade nylon.

- 20mm internal flow size with unique high flow retainer ring design and neoprene 'O' ring seal.
- Two 4mm countersunk fastening holes.
- 20mm bung plug diameter.



Part No.		Description	
Single	Bulk Bag of 10	- Description	
JPW5392	JPW5392B	Bung & Base Assembly White	
JPW5393	JPW5393B	Bung Plug only White	
JPW5394	JPW5394B	Bung & Base Assembly Black	
JPW5395	JPW5395B	Bung Plug only Black	

Plastic Bungs with 30mm Base Cut-Out

UV-resistant marine-grade nylon bung.

- 25mm internal flow size with unique high flow retainer ring design and neoprene 'O' ring seal.
- Two 4mm countersunk fastening holes.
- 25mm bung plug diameter.



Part No.		Description	
Single	Bulk Bag of 10	Description	
JPW5396	JPW5396B	Bung & Base Assembly White	
JPW5397	JPW5397B	Bung Plug only White	
JPW5398	JPW5398B	Bung & Base Assembly Black	
JPW5399	JPW5399B	Bung Plug only Black	

Plastic Bung with 38mm Base Cut-Out

UV-resistant black nylon bung and black washer.

- 30mm internal flow size.
- Two 4mm countersunk fastening holes.
- 30mm bung plug diameter.



JPW5400 JPW5410

Part No.		Description
Single	Bulk Bag of 10	Description
JPW5400	JPW5400B	Bung & Base Assembly
JPW5410	JPW5410B	Bung Plug only

High quality large size drain bung and base manufactured from UVresistant marine-grade nylon.

- · Large 35mm internal flow size with unique high flow retainer ring design and neoprene 'O' ring seal.
- Opening large enough to allow prawn heads, etc. to pass through.
- Four 4mm countersunk fastening holes.




Part No.		Description	
Single	Bulk Bag of 5	Description	
JPW5365	JPW5365B	Bung & Base Assembly White	
JPW5366	JPW5366B	Bung Plug only White	
JPW5367	JPW5367B	Bung & Base Assembly Black	
JPW5368	JPW5368B	Bung Plug only Black	

Plastic Bungs with 50mm Base Cut-Out

High quality large size drain bung and base manufactured from UVresistant marine-grade nylon.

- Large 45mm internal flow size with unique high flow retainer ring design and neoprene 'O' ring seal.
- Opening large enough to allow prawn heads, etc. to pass through.
- Four 4mm countersunk fastening holes.





Part No.		Description
Single	Bulk Bag of 5	Description
JPW5361	JPW5361B	Bung & Base Assembly White
JPW5362	JPW5362B	Bung Plug only White
JPW5363	JPW5363B	Bung & Base Assembly Black
JPW5364	JPW5364B	Bung Plug only Black

Nylon Bung with Stainless Steel Base

Coarse threaded nylon bung plug with polished 316 grade stainless steel base, complete with nitrile seal and retainer lug.

- 25mm internal flow size.
- 19mm plug diameter.
- Two 4mm countersunk fastening holes.

Part No.	Base L x W (mm)
JPW5354	51 x 37



Drain Bung and Base - Stainless Steel

316 grade stainless steel nut type plug complete with nitrile rubber seal and retainer lug.

- 25mm internal flow size.
- 19mm plug diameter.
- Two 5mm countersunk fastening holes.

Part No.	Base L x W (mm)
JPW5356	50 x 37



Weld-On Aluminium Drain Bung with **Plastic Bung**

Large drain plug with cast aluminium housing designed for weld in use, complete with nitrile rubber seal and retainer lug.

- · 35mm internal flow size.
- 45mm cut-out.

Part No.	Base L x W (mm)
JPW5374	65 x 75



Drain Plug Polished Stainless Steel

Polished 316 grade stainless steel 3 piece drain plug, complete with nitrile rubber seal and secure thread for a watertight seal.

- 30mm internal flow size.
- 30mm cut-out.

Part No.	Overall Dia (mm)	Plug Dia (mm)
JPW5353	50	20



Brass Garboard Drain Plug and Housing

50mm diameter brass housing complete with 3/4" brass drain plug.



JPW5226 Replacement Plug



JPW5225

Part No.	Description
JPW5225	Brass Garboard Drain Plug And Housing 50mm
JPW5226	Replacement Brass Garboard Drain Plug

Shock Cord Buttons

Plastic cord button to suit 5-7mm bungee straps.

• High quality and UV-stabilised.

Part No.	Colour
JPW5443	White
JPW5444	Black





Shock Cord Utility Loops

Shockcord loops for tensioning canopies and covers as well as securing ice box lids, etc. UV-stabilised moulded nylon head fitting with shock cord loop.

Part No.		Loop	Cord Dia
Black	White	Size (mm)	(mm)
JPW5500	JPW5505	70	5
JPW5501	JPW5506	80	5
JPW5502	JPW5507	90	5
JPW5503	-	100	5
JPW5504	-	110	5
.IPW5509		160	5



 $Length\ of\ loop\ taken$ from fixing point to extent of loop.

Lashing Hooks - Nylon

Strong, high quality and UV-stabilised.









JPW5456 JPW5457

JPW5458

JPW5459

Part No.		Tues	Suits Cord	Base Size	
White	Black	Туре	Dia (mm)	(mm)	
JPW5456	JPW5457	Horizontal	8	42 x 22	
JPW5458	JPW5459	Vertical	5	42 x 19	

Lashing Buttons - Nylon

Strong, high quality and UV-stabilised.

Part No.	Colour	Dimensions L x W (mm)
JPW5460	White	33 x 25
JPW5461	Black	33 x 25



Flat Webbing Saddles - Black Nylon Strong, high quality and UV-stabilised.

Part No.	Fastening Holes	Webbing Size (mm)
JPW5485	2 x 4mm	25
JPW5487	2 x 5mm	25
JPW5489	2 x 5mm	50






JPW5487

Nylon Saddle

Strong and high quality.

· Two 5mm fastening holes.





Nylon Conduit Saddle

Strong and high quality.

Two 5mm fastening holes.

Part No.	Hole Diameter
JPW5491	30



Webbing Strap Buckle - Nylon

Part No.	Description
JPW5463	25mm Nylon Webbing Strap Buckle



25mm Webbing Hook -Stainless Steel

- 316 stainless steel canopy strap hook.
- · Suits 25mm webbing.

Part No.	Dimensions W x H (mm)
JPW5462	35 x 33



25mm Webbing Snap Hook

- Stainless Steel
- 316-grade stainless steel, suits 25mm webbing.
- Sold as a pair.

Part No.	Dimensions W x H (mm)
JPW4920	35 x 54



Shock Cords Olive - Red

Strong, high quality and UV-stabilised.

Part No.	Cord Size	Dimensions		
	Part NO.	(mm)	A	В
	JPW5464	4 - 5	46	5
	JPW5465	5 - 7	67	6.5



Shock Cords Quick Connect - Black

Strong, high quality and UV-stabilised.



Dout No.	Dim	ns (mm)	
Part No.	Α	В	С
JPW5480	45	3 - 5	7
JPW5481	58	4 - 6	9
JPW5482	70	5 - 8	11



Stayput Fasteners - Stainless Steel

Made from 316-grade stainless steel, offering increased strength and a smooth appearance. Use to fix fabric to a boat, building or vehicle.

· Secure using a 6g countersunk screw or a 3mm pop rivet.

· Sold individually.

Part No.	Туре
JPW5421	Horizontal
JPW5422	Vertical



Canopy Deck Mounts - Nylon

Nylon plastic with nut and bolt to suit tube end.





Part No.	Size	Dimensions L x W x H (mm)	Gap Size (mm)	Colour
JPW5432	Small	60 x 19 x 20	7	White
JPW5438	Medium	60 x 18 x 30	7	Black

Stayput Plastic Fasteners - Single

Horizontal or vertical fasteners fix fabric to a boat, building or vehicle. Accepts one single eyelet (9.5mm approx).

· Secure using a 6g countersunk screw or a 3mm pop rivet.

· Supplied as a blister pack of two.

Part No.	Туре	Colour
916520	Horizontal	White
916521	Horizontal	Black
916524	Vertical	White
916525	Vertical	Black





Canopy Thumb Screws - Nylon

High quality, UV-stabilised moulded nylon plastic tops. Used with canopy mounts, making it easier to tighten or loosen your canopy.

• Stainless bolts with 1/4" UNC thread.







JPW5427

JPW5428

Part No.	Туре	Bolt Length (mm)	Colour
JPW5427	Star Bolt	15	White
JPW5428	Star Bolt	15	Black
JPW5429	2 Eared	25	White
JPW5433	3 Eared	25	White
JPW5445	3 Eared	25	Black



JPW5445

Stayput Plastic Fasteners - Double

Horizontal or vertical fasteners fix fabric to a boat, building or vehicle. Accepts two (double) eyelets (9.5mm approx).

• Secure using a 6g countersunk screw or a 3mm pop rivet.

• Supplied as a blister pack of two.

Part No.	Туре	Colour
916522	Horizontal	White
916526	Vertical	White



916526

Suits tube


Outside

Diameter

916522

Canopy Tube Knuckles - Nylon

UV-stabilised nylon.





_	- 0	
	m.	1
	64	

Tube Holders - Black Nylon

High quality and UV-stabilised. Ideal for paddles, boat hooks, landing nets etc.

- · Size shown is the outside diameter of the tube that it will hold.
- · Sold as singles or in pairs.
- 2 pre-drilled fastening holes.

	•	
Part	Suits Tube	
Single	Pair	Dia (mm)
JPW5474	JPW5474P	16
JPW5475	JPW5475P	20
JPW5476	JPW5476P	25
JPW5477	JPW5477P	30
JPW5478	JPW5478P	38
JPW5479	JPW5479P	48
JPW54/9	JPW54/9P	48





Canopy Tube Ends - Nylon

• UV-stabilised nylon.



Part No.		Suits Tube	Suits Tube	Tongue Size
White	Black	I.D (mm)	O.D (mm)	(mm)
JPW5431	JPW5436	16	20	6.5
JPW5452	JPW5453	19	25	8
JPW5454	JPW5434	21	25	7



Part No.	Туре	
JPW5440	16mm Tube Insert	
JPW5441	16 - 18mm Tube Knuckle	
JPW5442	Deck Mount with Screw	
JPW5446	Thumb Screw Replacement	



Canopy Tube Knuckles - Stainless Steel

Mirror polished cast 316-grade stainless steel, ideal for setting up tube-work around your boat.

· Secure tube with allen key grub screw.

Part No.	Suits Tube O.D.	Туре
JPW19074	(7/8") 22mm	Heavy Duty
JPW19077	(1") 25mm	Heavy Duty
JPW19076	(3/4") 19mm	Standard
JPW19106	(7/8") 22mm	Standard
JPW19107	(1") 25mm	Standard



Hinged Canopy Tube Knuckle Clamps - Stainless Steel

Made from 316-grade stainless steel, the design allows quick and easy fitting to a canopy system without having to disassemble the entire canopy.

Part No.	Suits Tube O.D
JPW19162	(7/8") 22mm
JPW19163	(1") 25mm



Canopy Tube Ends - Stainless Steel

Cast 316-grade stainless steel, mirror polished.

Part No.	Suits Tube O.D. (mm)	Suits Tube I.D. (mm)	Tongue Size (mm)
JPW19075	20	16	7
JPW19160	22	19	5.5
JPW19161	25	22	5.5
JPW19159	31	28	9



Canopy Deck Hinges - Stainless Steel

Cast 316-grade stainless steel mirror polished deck mount hinges.

· Connect canopy to deck or rail.



Part No.	Base Size (mm)	Height (mm)	Gap (mm)	Pin Type	Mount Type
JPW19086	60 x 19	37	9.3	Screw	Deck 90°
JPW19088	52 x 26	29	9.8	Screw	Deck 90°
JPW19108	60 x 16	34	7.7	Release	Deck 90°
JPW19109	61 x 22	37	7.7	Screw	Rail
JPW19110	61 x 22	37	7.7	Release	Rail
JPW19111	56 x 20	34	7.7	Screw	Deck 10°
JPW19121	56 x 20	34	7.7	Release	Deck 10°
JPW19120	Replacement Canopy Mount Quick Release Pin				

Canopy Tube Ends - Stainless Steel

Mirror polished cast 316-grade stainless steel.

• Small grub screw for securing to tube.



Part No.	Suits Tube O.D. (mm)	Tongue Size (mm)	Туре
JPW19119	20	7	Standard
JPW19104	22	7	Standard
JPW19105	25	7	Standard
JPW19072	22	10	Heavy Duty
JPW19073	25	8	Heavy Duty



Canopy Side Mounts - Stainless Steel

Cast 316-grade stainless steel side deck mount connect canopy to vertical or near vertical surfaces.





JPW19089

Part No.	Base Size (mm)	Height (mm)	Туре
JPW19087	50 x 22	28	Standard
JPW19089	72 x 47	32	Heavy Duty

Round Base Rail Fittings -**Stainless Steel**

Cast 316-grade stainless steel rail fittings with round base, mirror polished finished.



30° Angle

Part No.	Suits Tube O.D.	Angle Degree
JPW19130	7/8" (22mm)	30°
JPW19131	1" (25mm)	30°
JPW19132	7/8" (22mm)	45°
JPW19133	1" (25mm)	45°
JPW19128	7/8" (22mm)	60°
JPW19129	1" (25mm)	60°
JPW19140	3/4" (19mm)	90°
JPW19134	7/8" (22mm)	90°
JPW19135	1" (25mm)	90°



45° Angle



60° Angle



60 Degree Rail Centre and End Fittings

Cast 316-grade stainless steel make your own hand rails to any desired length using the end and centre fittings to suit 22mm and 25mm outside diameter tubes.


• Two 4mm fastening holes.



Part No.		Suits Tube	Angle
End	Centre	O.D.	Angle Degree
JPW19054	JPW19053	7/8" (22mm)	60°
JPW19125	JPW19123	1" (25mm)	60°

Corner Fittings 3 x Tube

Cast 316-grade stainless steel fittings, mirror polished finished.





Part No.	Suit Tubes O.D.	Angle Degree
JPW19149	7/8" (22mm)	3 tube 90°
JPW19150	1" (25mm)	3 tube 90°

Tee Fittings - Stainless Steel

Cast 316-grade stainless steel tee fittings, mirror polished finished.



Part No.	Suits Tube O.D.	Angle Degree	Grub Screws	
JPW19141	3/4" (19mm)	90°	One side	
JPW19138	7/8" (22mm)	90°	One side	
JPW19139	1" (25mm)	90°	One side	
JPW19136	7/8" (22mm)	60°	Centre	
JPW19137	1" (25mm)	60°	Centre	

Cross Fittings 4 x Tube - Stainless Steel

Cast 316-grade stainless steel four tube cross fittings, mirror polished finished.

Part No.	Suits Tube O.D.
JPW19142	7/8" (22mm)
JPW19143	1" (25mm)



90 Degree Elbow Rail End Fittings - Stainless Steel

Cast 316-grade stainless steel hand rail ends with 90 degree elbow.

Part No.	Suits Tube O.D.
JPW19147	7/8" (22mm)
JPW19148	1" (25mm)



End Mount Rail Fittings -Stainless Steel

rail ends with 90° centres and



Part No.	Suits Tube O.D.	Height (mm)
JPW19145	7/8" (22mm)	38
JPW19146	1" (25mm)	38

Flush Mount Flag Pole Holder - Stainless Steel

Cast 316 grade stainless steel flag pole holder with 30 degree angled oval head and white plastic removable cap.

- · Suits 25mm pole.
- Sits inside the deck/gunwale for a flush finish.
- Three 5mm fastening holes.

Part No.	Head Size L x W (mm)	Cut-out Size (mm)
JPW19069	72 x 50	33

Surface Mount Flag Pole Holder - Stainless Steel

Cast 316-grade stainless steel angled style with allen key grub screw to hold flag pole in place.

• Three 4mm fastening holes.



Part No.	Dia of Pole (mm)	Base Dia. (mm)	Height (mm)
JPW19067	25	68	48

Swivel Mount Antenna Base - Stainless Steel

Heavy duty cast 316-grade stainless steel deck mount antenna base. Suits various internally threaded GPS antennas and other aerials.

· Base mount horizontally or vertically with double angle adjustment and locking handle.

· Four 6mm fastening holes.

Part No.	Dimensions L x W x H (mm)	Thread
JPW19066A	92 x 64 x 108	3/4"

Rail Mount Antenna Holder -Stainless Steel

Heavy duty cast stainless steel rail mount antenna base to suit 7/8" or 1" rails.

• Full ratchet angle adjustment and locking handle.

· Suits various internally threaded GPS antennas and other aerials.

Part No.	Suits Tube Size	Thread
JPW19066B	7/8"-1"	3/4"

Deck Mount Antenna Base -Stainless Steel

Straight antenna base with three 6mm fastening holes.

· Suits various internally threaded GPS antennas and other aerials.

Part No.	Base Dia (mm)	Height (mm)	Thread	
JPW1286	71	105	3/4"	

Boat Rego Numbers and Letters

- Self adhesive white square sticker with black text.
- Meets Department of Transport approval.
- Must be purchased in multiples of 10.
- Small: 65 x 50mm Large: 160 x 85mm






Small Part No.	Large Part No.	Number / Letter
JPW5351-0	JPW5350-0	0
JPW5351-1	JPW5350-1	1
JPW5351-2	JPW5350-2	2
JPW5351-3	JPW5350-3	3
JPW5351-4	JPW5350-4	4
JPW5351-5	JPW5350-5	5
JPW5351-6	JPW5350-6	6
JPW5351-7	JPW5350-7	7
JPW5351-8	JPW5350-8	8
JPW5351-9	JPW5350-9	9
JPW5351-A	JPW5350-A	Α
JPW5351-B	JPW5350-B	В
JPW5351-C	JPW5350-C	С
JPW5351-D	JPW5350-D	D
JPW5351-E	JPW5350-E	E
JPW5351-F	JPW5350-F	F
JPW5351-G	JPW5350-G	G
JPW5351-H	JPW5350-H	Н
JPW5351-I	JPW5350-I	1
JPW5351-J	JPW5350-J	J
JPW5351-K	JPW5350-K	K
JPW5351-L	JPW5350-L	L
JPW5351-M	JPW5350-M	M
JPW5351-N	JPW5350-N	N
JPW5351-O	JPW5350-O	0
JPW5351-P	JPW5350-P	Р
JPW5351-Q	JPW5350-Q	Q
JPW5351-R	JPW5350-R	R
JPW5351-S	JPW5350-S	S
JPW5351-T	JPW5350-T	T
JPW5351-U	JPW5350-U	U
JPW5351-V	JPW5350-V	V
JPW5351-W	JPW5350-W	W
JPW5351-X	JPW5350-X	X
JPW5351-Y	JPW5350-Y	Υ
JPW5351-Z	JPW5350-Z	Z

Deck Mount Antenna Base - White Nylon


ABS plastic standard straight antenna base with three 6mm fastening holes.

· Suits various internally threaded GPS antennas and other aerials.



Swivel Mount Antenna Base - White Nylon

ABS plastic quick release antenna base adjusts in all directions and suits various internally threaded GPS antennas and other aerials.



· Stainless steel bolts and nuts.

Part No.	Base Dimensions L x W (mm)	Thread
JPW1284	93 x 65	3/4"

Extended

Above Platform Telescopic Ladders -Stainless Steel

316-grade stainless steel above platform telescopic boarding ladders. Compact design includes hinged brackets to allow ladder to retract, flip back and fold over platform when not required.

• 4 different styles available with either 2-steps, 3-steps or 4-steps.

• Secure closed with the bungee cord supplied.

Telescopic Ladder -**Moulded Ribbed Steps**

Moulded ribbed nylon tread on each step for comfortable boarding.

Type

2-Step

3-Step

4-Step

350

380

405

370

395

370

395

600

880

1160

875

1145

875

1145

300

300

Part No.

JPW6143

JPW6142

JPW6144

Part No.

JPW6152

JPW6153

Part No.

JPW6154

JPW6155





285

295

305

270

270

270



Retracted

& flipped

Mount

e[

106°

Retracted


Telescopic Ladders -Double Tube Steps

Type

3-Step

4-Step

Steps made from double stainless steel tubes with moulded black nylon for a more stable tread.

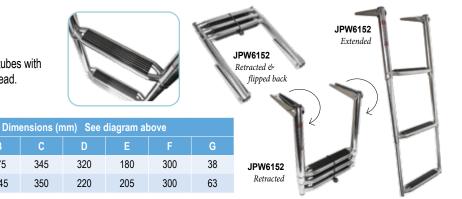

Telescopic Ladders -Extra Wide Steps

Extra wide moulded solid nylon steps for sure footing.



180

205



JPW6156

Retracted &

Retracted

JPW6154

JPW6156

Extended

JPW6155

Retracted & flipped back

Telescopic Ladders -Top Rail

Type

3-Step

4-Step

Moulded ribbed nylon tread and top rail with finger grips to make it easier to get into and out of the water.



Dimensions (mm) See diagram above

275

275





			·1············					
Part No.	Type		Dimensions (mm) See diagram above					
	туре	Α	В	С	D	Е	F	G
JPW6156	3-Step	370	875	295	275	180	255	38



Heavy duty 316-grade stainless steel above platform telescopic boarding ladder is ideal for diving, with wide open steps giving easy access for divers wearing fins.

- · Retracts and flips back over platform when not in use.
- Dual centre post for added strength and assist when climbing.







Part No.	Type	Dimensions (mm)						
Fait No.	Туре	Α	В	С	D	Е	F	
JPW6150	3-Step	430	860	335	180	59	33	
JPW6151	4-Step	480	1125	335	210	71	33	

Above Platform Telescopic Ladder with Hand Rails - Stainless Steel


316-grade stainless steel telescopic boarding ladder with large top hand rails to make it easier to get into and out of the water.

Hinged brackets allow the steps to be retracted and flipped back, for easy storage when not in use.

- · Supplied flat some assembly is required.
- · Secure closed with the bungee cord supplied.


Part No.

JPW6163



	Retracted & flipped back							
			Dimensio	ons (mm)				
Α	В	С	D	Е	F	G	Н	
390	1431	390	368	270	330	90	554	

(



Above Platform Telescopic Ladder with **Grab Handles - Stainless Steel**

Constructed from 316-grade stainless steel this 4-step ladder has two folding grab handles, a top hand rail and heavy duty steps with double tubes for strength and a nylon insert for grip.

• Grab handles and telescopic rungs stow away compactly when not in use.

470

· Secure closed with the bungee cord supplied.

Type

4-Step

Type

4-Step




Part No.

JPW6164





В 1140




Bracket

C D E F G H		Dimension	ons (mm)			
100 000 100 000 01 0	С	D	Е	F	G	Н
460 320 180 303 64 375	460	320	180	303	64	375

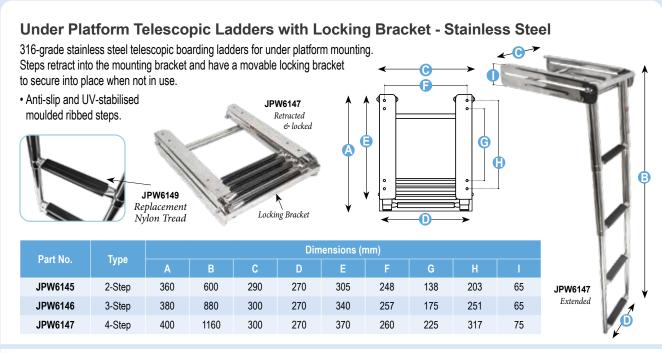

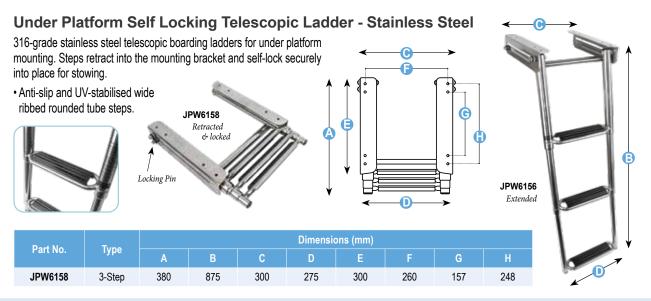

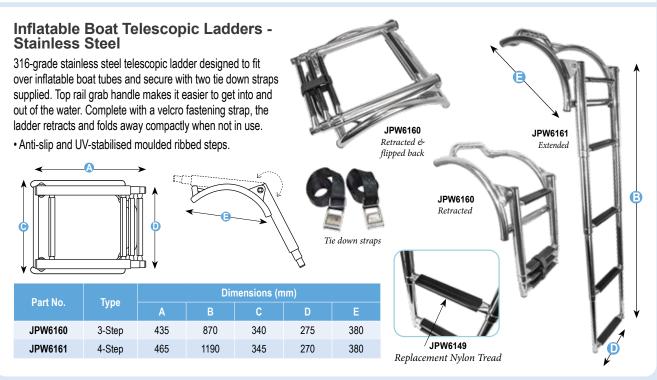

Folding Step - Stainless Steel


A heavy duty, solid cast 316-grade stainless steel folding step.



Transducer Covers - Stainless Steel

Eliminate the spray and splash-back from your boat's transducer, and reduce any water noise that might affect the picture on your sounder.

Viper



Part No.	Туре	Size (mm)
JPW12847	Small	150 x 135
JPW12848	Large	160 x 200


Transducer Brackets -Aluminium

Anodised aluminium sliding transducer brackets with adjustable position.

 Removable for easy stowage or security reasons.

• Bracket length: 205mm

• JPW4933: Includes 25mm hole.




Part No.	Diete Tune	Dimensions (mm)			
Part No.	Plate Type	A	В	С	
JPW4932	Large Flat	93	152	-	
JPW4933	Right Angled	112	90	65	
JPW4934	Small Flat	50	85	-	

Stainless Steel Davit - Pair

Polished 316-grade stainless steel lightweight davit with recessed deck mounts. Sold as a pair with lifting tackle included.

- Removable arms to provide more space on deck and transom.
- Ideal for lifting outboard motors, sea bags, scuba gear etc.
- · Can be used on sailboats or powerboats.
- · Weatherproof and corrosion resistant.
- Removable arms swivel around 360°
- · Lifting capacity per pair: 100kg or 160kg.
- Overall L x H: 800 x 1050mm.



Removable Base

Part No.	Capacity	Ва	se Dimen	sions (m	m)
Pail NO.	(kg)	Α	В	С	D
JPW6174	100	120	130	45	40
JPW6175	160	130	145	54	50



Kit includes:

- 2 x Davit Arms (Height: 1050mm) with removable bases and under deck base plates
- 2 x 8mm snap hooks
- 2 x 6mm 'D' shackles
- 2 x 40mm pulleys
- 2 x 8mm nylon ropes (Length: 2.5m)

*Mounting bolts not supplied.

Scanstrut PowerTower Aluminium 150mm

Designed and engineered to install a radar on the roof, T-top, fly-bridge or radar arch of a powerboat. Pre-drilled mounting holes allow the radar to fasten straight to the PowerTower top plate with the radar's own mounting bolts.

- · Made from marine grade aluminium.
- · Watertight installation marine sealant not required.
- · Hollow stem for internal cable routing through the center.
- Top plate with center hole and internally mounted cable seal.
- Overall LxWxH: 280 x 290 x 150mm

Part No.	Colour
JPW10450	White
JPW10451	Black



SCANSTRUT

SCANSTRUT

Scanstrut Composite PowerTower

These single "monocoque" structures with no joints, have outstanding strength and the aerodynamic shape and high gloss finish makes a product that is as strong as it is attractive.

- Hollow stem for internal cable routing through the center.
- · Watertight installation marine sealant not required.
- · Made from white composite materials.



Part No.	Length (mm)	Width (mm)	Height (mm)
JPW10462	370	275	350
JPW10463	268	275	150

Scanstrut PowerTower Base Wedge 4deg

Angles the radar down 4° below horizontal to provide a level horizon for the radar when the boat is underway.

- Tough, marine-grade and UV stable.
- Fits the Composite and Aluminium PowerTowers above.



SCANSTRUT

Part No.	Dimensions L x W x H (mm)
JPW10465	200 x 200 x 20



Scanstrut PowerTower Central Light Bar Mount

Central light bar for mounting a range of navigation lights onto the Scanstrut PowerTowers with internal cable routing.

- · Max weight: 1kg.
- Length x Height: 262 x 404mm.
- Suits Aluminium PowerTowers (JPW10450 & JPW10451).

Part No.	Colour
JPW10450	White
JPW10451	Black



SCANSTRUT.


Accessories not included


SCANSTRUT

Scanstrut Flagship **Tapered Radar Mount**

A single combination mount for radar, lights, GPS/VHF antennas, cameras or search lights, with each item perfectly positioned for maximum performance.

Compatible with all current 18" and 24" radomes.





· Un-drilled top plate to fit any light.

 Install up to 4 GPS/VHF antennas.





ScanStrut Radar **Mast Mounts**

Made from marine-grade aluminium, these radar mounts attach to mast with four swivel feet, matching a variety of mast profiles.

- Universal strong fixing mounting with pre-drilled holes.
- Minimum mast width: 65mm.
- 12 point fixing using high-quality Monel rivets.

· Includes Safety Wire kit.



Part No.	Colour	Length (mm)	Width (mm)
JPW10491	Black	395	263
JPW10492	White	395	263
JPW10461	White	484	263

StopGull Air Seagull Deterrent

The StopGull Air prevents the landing of seagulls and coastal birds on boats, boat's hardtops, inflatables, sailboats and professional vessels. The flags housed at the end of the bar start to rotate when wind hits them, deterring birds from perching on the boat.



- Easy to install, arms fold upwards and can removed from the base for stowing.
- Can be applied to any part of your boat using additional supports (sold separately).



Part No.	Length (m)
JPW10310	1.85
JPW10311	2.35




Overall length includes flags

StopGull Air Handrail Support

This StopGull Air Support can be attached to 22 - 38mm diameter handrails and is made of anodised aluminium.

- Install in a vertical or horizontal position.
- · Quick and easy to install.





Part No.	Height (mm)	Length (mm)	Width (mm)
JPW10315	130	70	16

StopGull Air Boom and Folded Bimini Support

This StopGull support allows you to install the StopGull Air device at any kind of bimini when they are folded or aluminium booms when the sails are lowered.

 Includes long textile straps with safety fasteners.





Part No.	Straps Length (m)
JPW10319	1

StopGull Air Large Rail Mount Support 38mm To 110mm

The StopGull Air Large Rail Support mount can be attached to rails from 38mm - 110mm diameter. Simply place the support on top of the rail, and pull the elastic cord tight around the rail, securing with the eyelets.



Part No.	Height (mm)	Length (mm)	Width (mm)
JPW10328	40	160	240

StopGull Air Open Bimini Support

For mounting the StopGull Air onto an open bimini and is adaptable for tubes from 22 to 38mm. Made from 316-grade stainless steel.

• Can be folded with the bimini arch support installed.





Part No.	Height (mm)	Length (mm)	Width (mm)
JPW10316	60	60	40

StopGull Air Suction Cup Support

The Suction Cup Support is suitable for installation of the StopGull Air device at hatches, outboard motors, etc. Includes the base to fit the StopGull Air easily.

Part No.	Height (mm)	Length (mm)	Width (mm)
JPW10317	100	70	70





StopGull Air RIB Support Kit

This StopGull Support will fit the StopGull Air device to all kinds of inflatable boats. Made from a nautical acrylic fabric with flexible ropes and four hooks to fix at the external profile of the inflatable boat. It also includes a telescopic mast for its final tightening.



StopGull Air Boat Vent 3 Support

The StopGull Air can be installed on the mooring canvas through the Boat Vent 3 device to provide two great benefits. It prevents seagulls and coastal birds from landing on the mooring canvas and at the same time allows the inside of the boat to aerate to prevent moisture, mildew and bad smell.






Part No.	Diameter (mm)	Height (mm)
JPW10322	120	50

StopGull Air Keeper

Designed to be installed on the radar, TV antenna, lamp posts, marine installations, etc. where gulls and shorebirds use as a lookout point.

- Deters birds by the disposal of its rods and their movement by the wind.
- Installation requires an industrial adhesive.



Part No.	Diameter (mm)	Height (mm)
JPW10326	500	310

StopGull Air S27 Transparent

The swivel piece StopGull S27 is designed for installing on critical points on your boat to deter gulls and shorebirds. Prevents birds landing on the mast spreaders, top of mast, nav lights, etc.

- Includes a double sided adhesive for installation.
- · Can be installed at port signals.





Part No.	Diameter (mm)	Height (mm)
JPW10327	50	55

StopGull Air Boat Vent Telescopic Support Pole



Part No.	Length (mm)
JPW10324	850 - 1500
JPW10325	950 - 1800

StopGull Air Replacement Base Mount

Replacement Base Mount for StopGull Air.

Part No. JPW10340



StopGull Air Sandbag Support

The StopGull Sandbag Support is suitable for installing the StopGull Air device on rough surfaces as well as deck mats.

· Sand not included.

Part No.	Size (mm)
JPW10321	350 x 350





HOW TO ORDER

Select products from the catalogue or through our website using the product categories or search function. Make note of the part numbers to facilitate ordering.

ONLINE



Login to our website with your customer username & password.

www.jpwmarine.com.au

If you know our product codes, use the 'Quick Order' form for a speedy checkout.

PHONE



Call us during standard Western Australian business hours on

(08) 6253 3000 to place order by phone.

EMAIL



Email your order to orders@jpwmarine.com.au

